
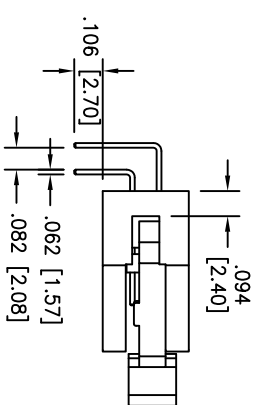
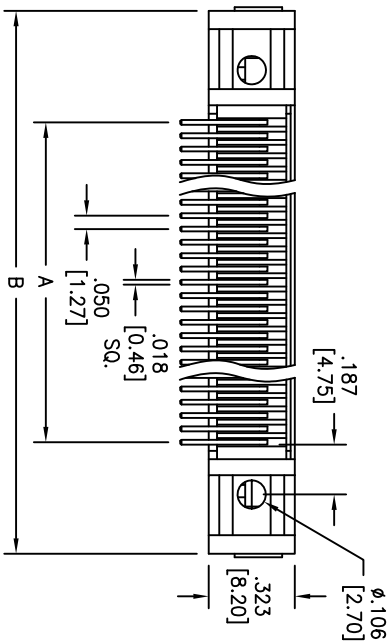
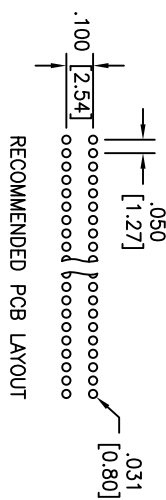


Rev	AWO #	Description	Date	Appr
-	9799	RELEASED	10/22/09	

APPROVED: \_\_\_\_\_ TITLE: \_\_\_\_\_  
 DATE: \_\_\_\_\_

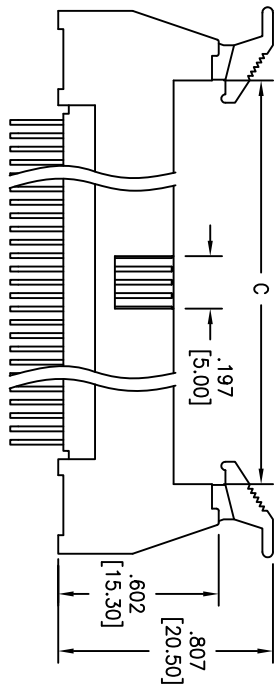

**SPECIFICATION:**  
**Material:**  
 Insulator: PBT, rated UL-94V-0  
 Insulator Color: Black  
 Contacts: Brass  
**Contact Plating:**  
 Gold Flash over Nickel underplate overall.  
**Electrical:**  
 Operating Voltage: 350V AC max.  
 Current rating: 5 Amps max.  
 Contact resistance: 20 mohms max  
 Insulation resistance: 1000 Mohms min  
 Dielectric withstanding voltage: 1000 VAC / minute  
**Temperature Rating:**  
 Operating temperature: -40°C TO +105°C  
 Environmental:  
 Lead free, RoHS compliant.  
 Recommended soldering temp: 235°C for 5 sec.

**POSITIONS:** 10, 16, 20, 26, 30, 32, 34, 40, 44, 50, 52, 60, 68, 70, 80, 100  
 A = .050 [1.27] X No. of Positions / 2 - .050 [1.27]  
 B = .050 [1.27] X No. of Positions / 2 + .780 [19.80]  
 C = .050 [1.27] X No. of Positions / 2 + .256 [6.51]

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES: .10 ± .020 ØXX ± .015  
 .XXX ± .015  
 APPROVALS: \_\_\_\_\_ DATE: \_\_\_\_\_

**ADAM TECH**  
 909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .050 [1.27] SHRDEDDED HEADER W/ LATCHES,  
 RIGHT ANGLE, PCB TYPE, GOLD PLATED

DRAWN	BY	DATE	SIZE	PART NO.	REV.
CHECKED		10/22/09	X	HMHR-XX-HUAS	-
APPROVED			REF:	S00041T	SCALE: NTS

