

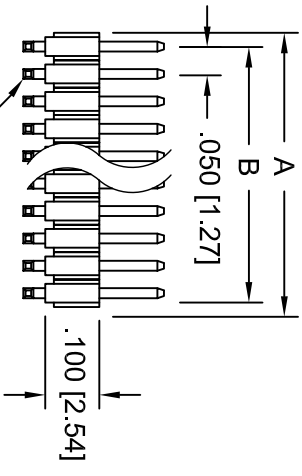
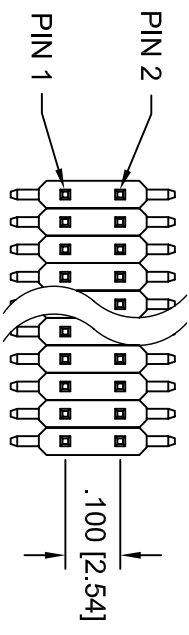


APPROVED: _____
 DATE: _____ TITLE: _____

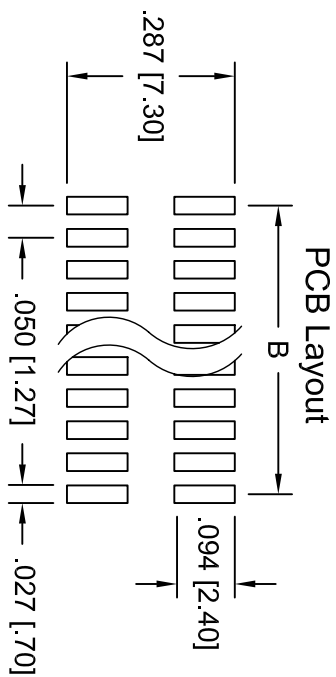

.018 [0.46] SQ.

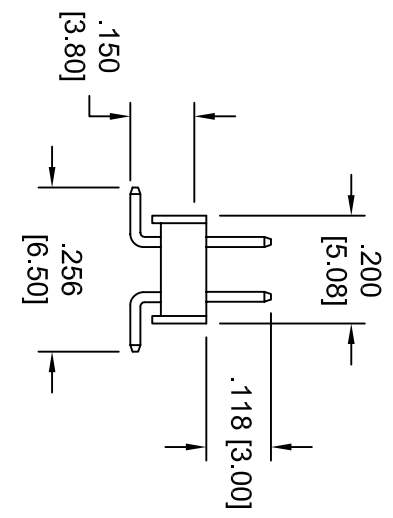

PCB Layout

A = [1.27 X (NO. OF CONTACTS / 2)]
 B = [1.27 X (NO. OF CONTACTS / 2-1)]

SPECIFICATIONS:

Material:
 Insulator: Nylon 6T, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating:
 Gold Flash over Nickel underplate on mating area, tin over
 Copper underplate on SMT tails

Electrical:
 Operating voltage: 250 VAC max
 Current rating: 1 Amp max
 Contact resistance: 20 mohms max
 Insulation resistance: 5000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -40°C to +105°C

Lead free, RoHS Compliant
 Recommended soldering temp: 260°C for 5 seconds

Rev	AWO #	Description	Date	Appr
-	7422	RELEASED	01/10/07	
A		ADDED DIMENSION	5/13/08	

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .050" X .100" PIN HEADER, DUAL ROW
 SELECTIVE GOLD PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]			
.X	± .10	ØX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXX	± .010
APPROVALS		DATE	
DRAWN	SS	9/28/04	
CHECKED			
APPROVED			

SIZE	PART NO.	REV.
X	HPH2-B-XX-SGA-SMT	A
REF:	SCALE: NTS	SHEET 1 OF 1

