

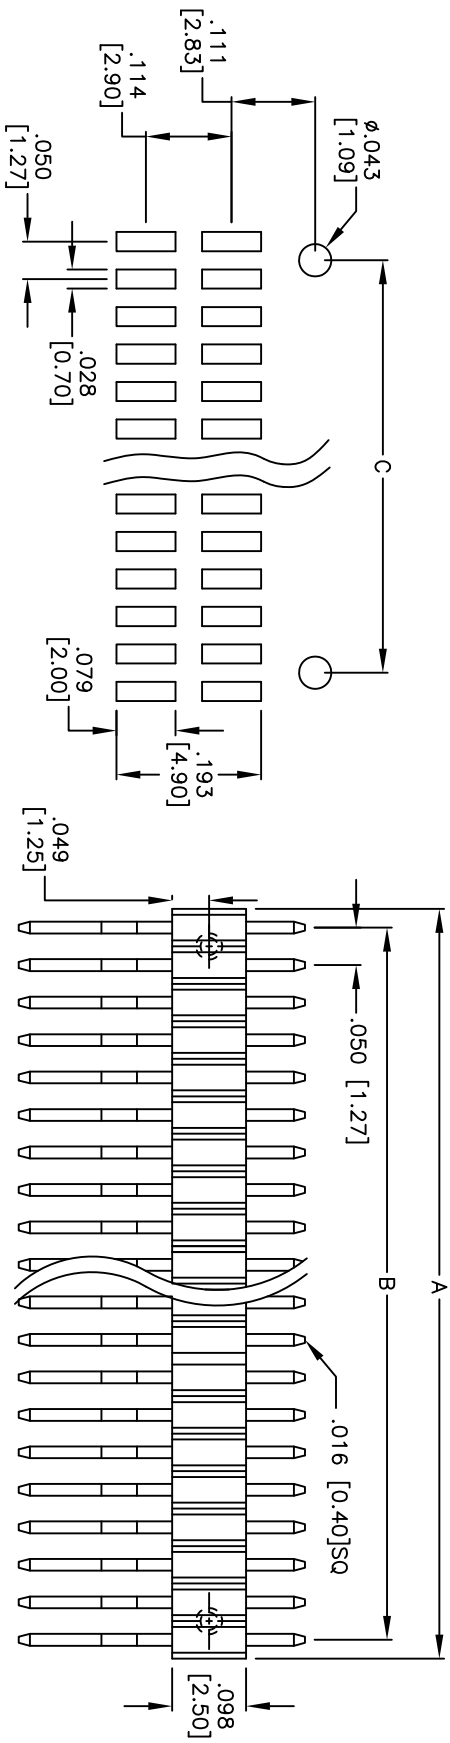


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/10/10	

APPROVED: _____ TITLE: _____
 DATE: _____

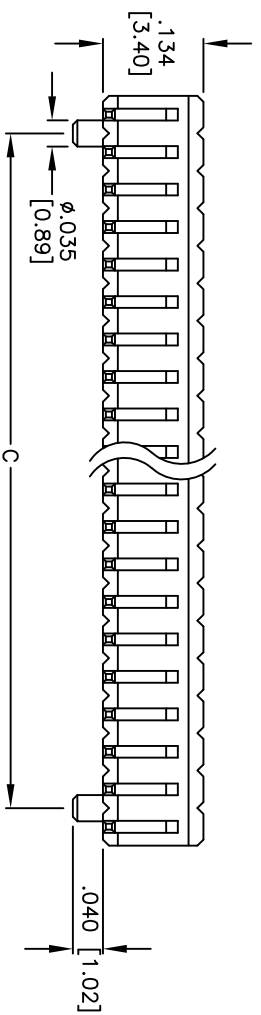

RECOMMENDED PCB LAYOUT

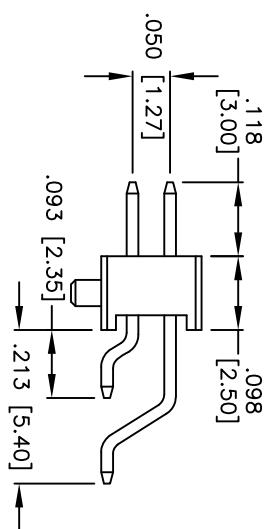

Positions: 6 thru 66
 A = .050 [1.27] x No. of Positions per row
 B = .050 [1.27] x No. of Spaces
 C = .050 [1.27] x No. of (Positions-2) per row

SPECIFICATIONS:
Material: Insulator: LCP, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
Plating: Gold flash over Nickel underplate overall
Electrical: Current rating: 1 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 1000 Mohms min
 Dielectric withstanding voltage: 300 VAC
Temperature Rating: Operating temperature: -40°C to +105°C
Environmental: Lead free, RoHS compliant.
 Recommended soldering temp: 260°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES		HOLE SIZE		TITLE	
.X	± .10	Ø.X	± .10	.050 [1.27] DUAL ROW PIN HEADER	
.XX	± .020	Ø.XX	± .015	SMT, GOLD PLATED, W/ PEG	
.XXX	± .015	Ø.XXX	± .010		
APPROVALS		DATE		REV.	
DRAWN	AY	12/10/10		SIZE	PART NO.
CHECKED	AH	12/10/10		X	HPH2RA-XX-U-SMT-.118-P-HT
APPROVED				REF:	S00032T
		SCALE:	NTS	SHEET	1 OF 1

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

6 5 4 3 2 1