
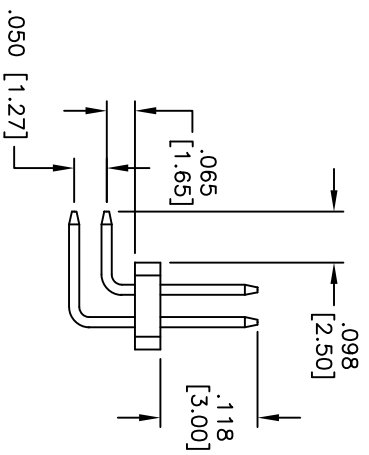
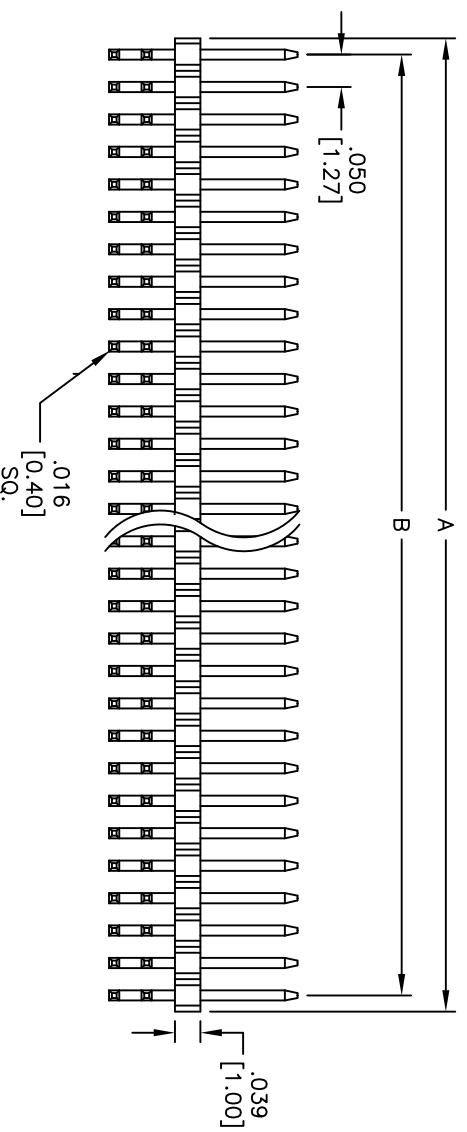
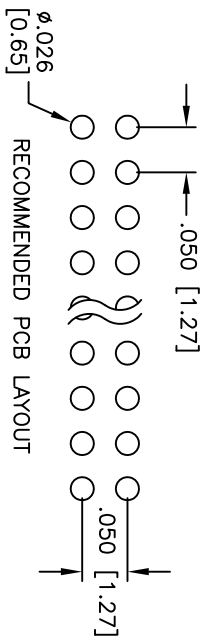


Rev	AWO #	Description	Date	Appr
-	11409	RELEASED	5/27/11	

APPROVED: _____
 DATE: _____ TITLE: _____

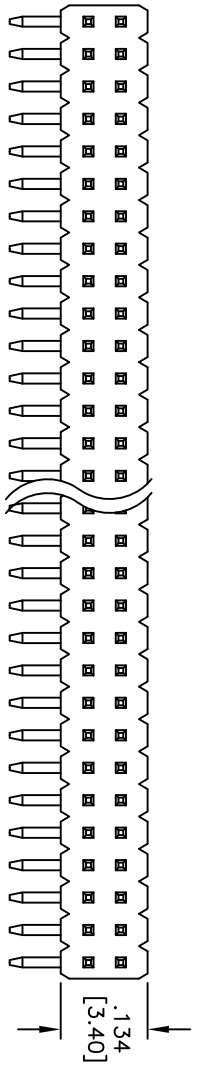

SPECIFICATIONS:

- Material: Insulator: PBT, glass reinforced, rated UL 94V-0
- Insulator color: Black
- Contacts: Brass
- Plating: Gold flash over Nickel underplate overall
- Electrical: Current rating: 1 Amp max
- Contact resistance: 20 mohms max
- Insulation resistance: 1000 Mohms min
- Dielectric withstanding: 300 VAC
- Temperature Rating: Operating temperature: -40°C to +105°C
- Environmental: Lead free, RoHS compliant
- Recommended soldering temp: 235°C for 5 seconds

Positions: 4 thru 100
 A = .050 [1.27] x No. of Positions per row
 B = .050 [1.27] x No. of Spaces

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .050 [1.27] SINGLE ROW PIN HEADER
 RIGHT ANGLE, GOLD PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
INCHES		HOLDS	
.X	± .10	ØX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXX	± .010
APPROVALS		DATE	
DRAWN	DY	5/27/11	
CHECKED			
APPROVED			
SIZE	PART NO.	REF:	SCALE:
X	HPH2RA-XX-1JA	S00032T	NTS
REV.		SHEET	1 OF 1

