

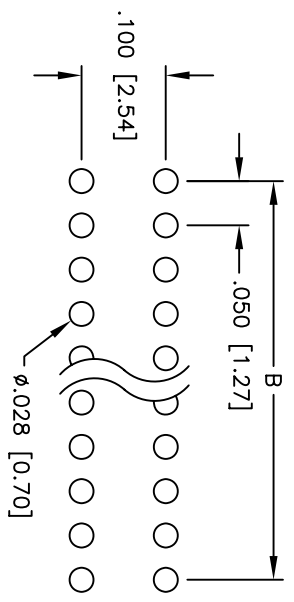
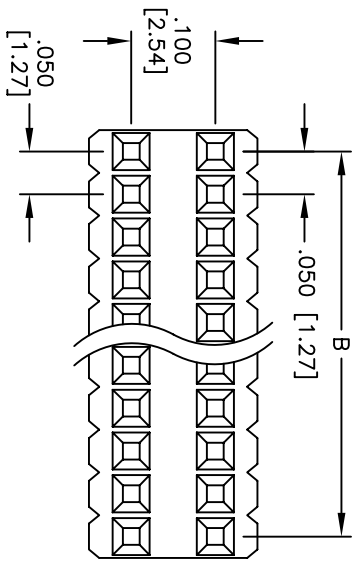


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/25/05	

APPROVED: _____
 DATE: _____ TITLE: _____

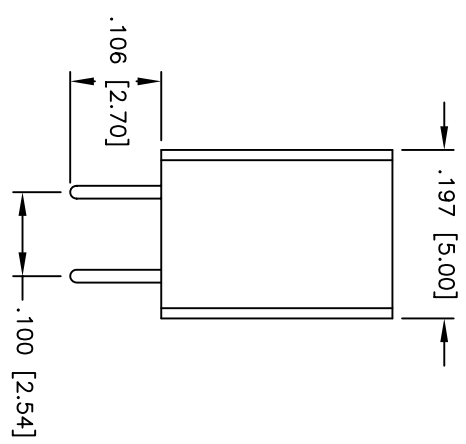

RECOMMENDED
PCB LAYOUT

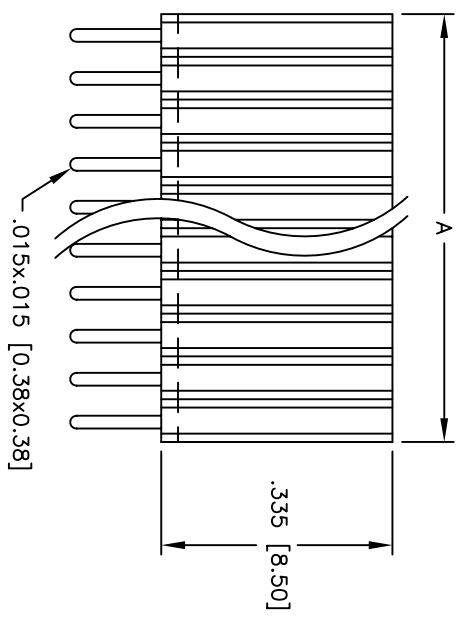

SPECIFICATIONS:

Material: Nylon 6T, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Plating: Tin over Copper underplate overall

Electrical:
 Operating voltage: 250 VAC max.
 Current rating: 1 Amp max.
 Contact resistance: 20 mohms max. initial
 Insulation resistance: 5,000 Mohms min.
 Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:
 Operating temperature: -40°C to +105°C
Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 235°C for 5 seconds



Positions: 02 thru 80
 A = .050 [1.27] x No. of Positions per Row
 B = .050 [1.27] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

.X	± .10	ØX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXX	± .010

APPROVALS: _____ DATE: _____

DRAWN	SS	5/25/05	<p>ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710</p> <p>STANDARD PROFILE .050 x .100 DUAL ROW RECEPTACLE STRIP</p>
CHECKED			
APPROVED			

SIZE	PART NO.	REV.
X	HRS-2A-XX-TA	

REF: _____ SCALE: NTS SHEET 1 OF 1