
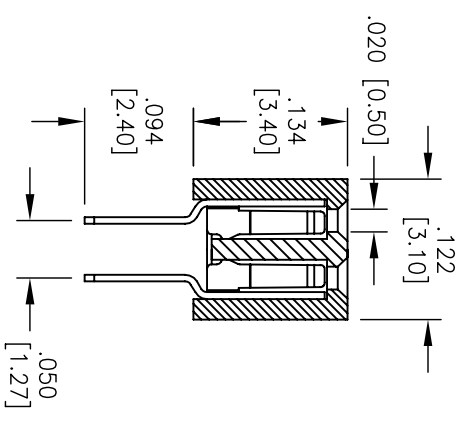
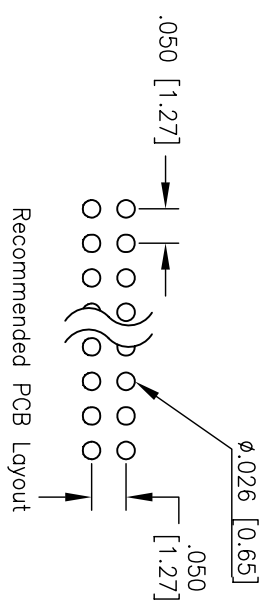
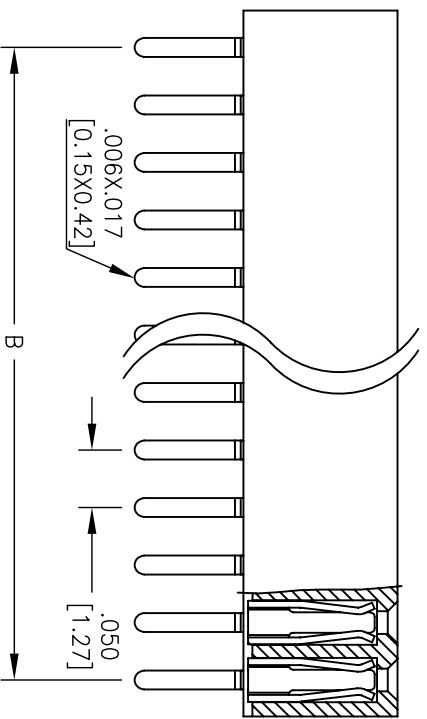


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/17/08	

APPROVED: _____
 DATE: _____ TITLE: _____

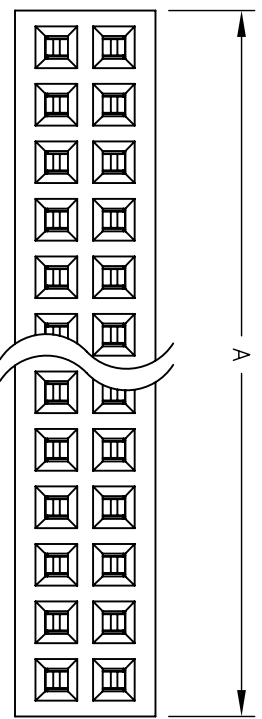

A = .050 [1.27] X No. of Positions + .014 [0.35]
 B = .050 [1.27] X No. of Spaces

SPECIFICATIONS:

- Material: Insulator: PBT, rated UL 94V-0
- Insulator color: Black
- Contacts: Phosphor Bronze
- Plating: Gold Flash over nickel underplate
- Electrical: Operating voltage: 250 VAC max
- Current rating: 1 Amp max
- Contact resistance: 20 mohms max
- Insulation resistance: 5000 Mohms min @ 500 VDC
- Dielectric withstanding voltage: 1000 VAC for 1 minute
- Temperature Rating: Operating temperature: -40°C to +105°C
- Environmental: Lead free, RoHS compliant.
- Recommended soldering temp: 235°C for 5 sec.

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	MM
X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

APPROVALS

DATE	DATE
DRAWN DY	7/17/08
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .050" RECEPTACLE STRIP, DUAL ROW,
 .134" INSULATOR HEIGHT, GOLD PLATED

SIZE	PART NO.	REV.
X	HRS-2E-XX-G	-

SCALE: NIS SHEET 1 OF 1