

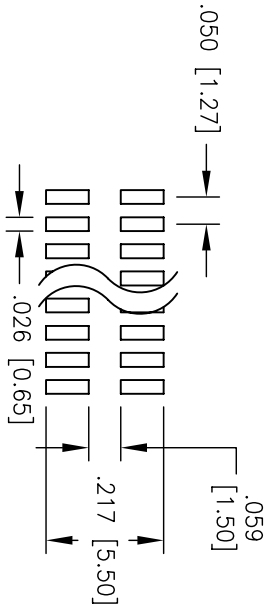
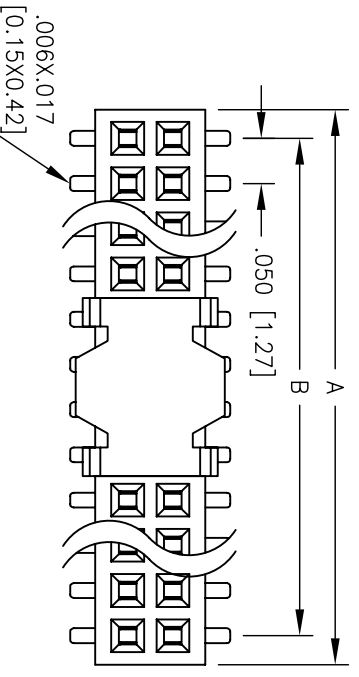


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/17/08	

APPROVED: _____ TITLE: _____
 DATE: _____

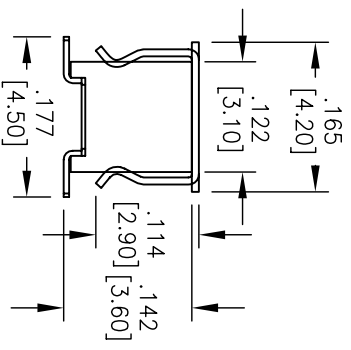

Recommended PCB Layout

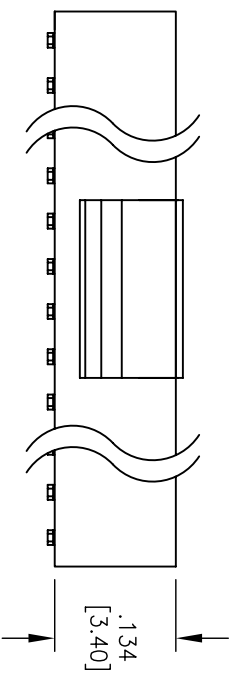

NOTE: PACKAGED ON TAPE & REEL

A = .050 [1.27] X No. of Positions + .014 [0.35]
 B = .050 [1.27] X No. of Spaces

SPECIFICATIONS:

- Material:** Insulator: Nylon 46, rated UL 94V-0
 Insulator color: Black
- Contacts:** Phosphor Bronze
- Plating:** Gold Flash over Nickel underplate on contact area,
 Tin over Copper underplate on SMT tail.
- Electrical:** Operating voltage: 250 VAC max
 Current rating: 1 Amp max
 Contact resistance: 20 mohms max
 Insulation resistance: 5000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC for 1 minute
- Temperature Rating:** Operating temperature: -40°C to +105°C
- Environmental:** Lead free, RoHS compliant.
 Recommended soldering temp: 260°C for 5 sec.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
X .XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN DY	7/17/08
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .050" RECEPTACLE STRIP, DUAL ROW, SMT
 .134" INSULATOR HEIGHT, SEL GOLD PLATED

SIZE	PART NO.	REV.
X	HRS-2E-XX-SG-SMT-PP-T/R	-
REF:	SCALE: NTS	SHEET 1 OF 1

