
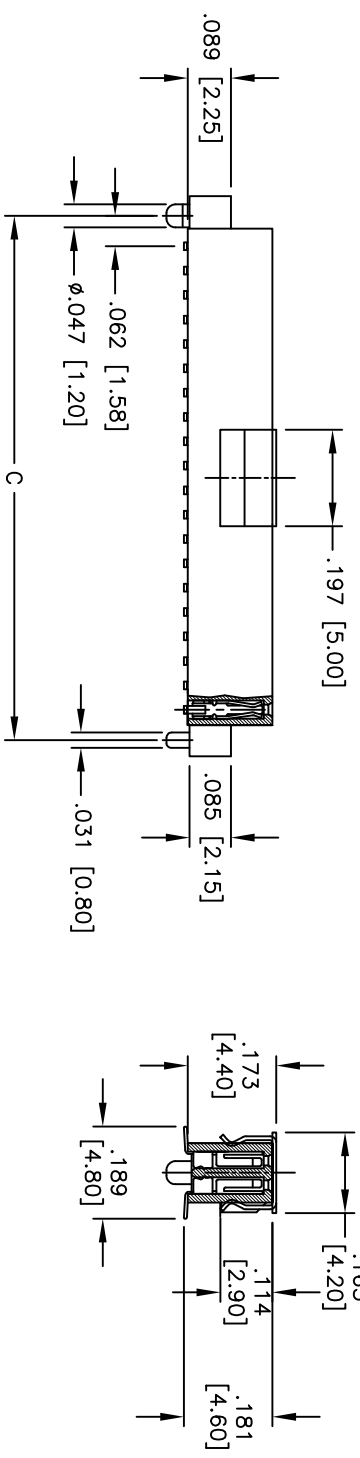


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/27/10	

APPROVED: _____

DATE: _____ TITLE: _____

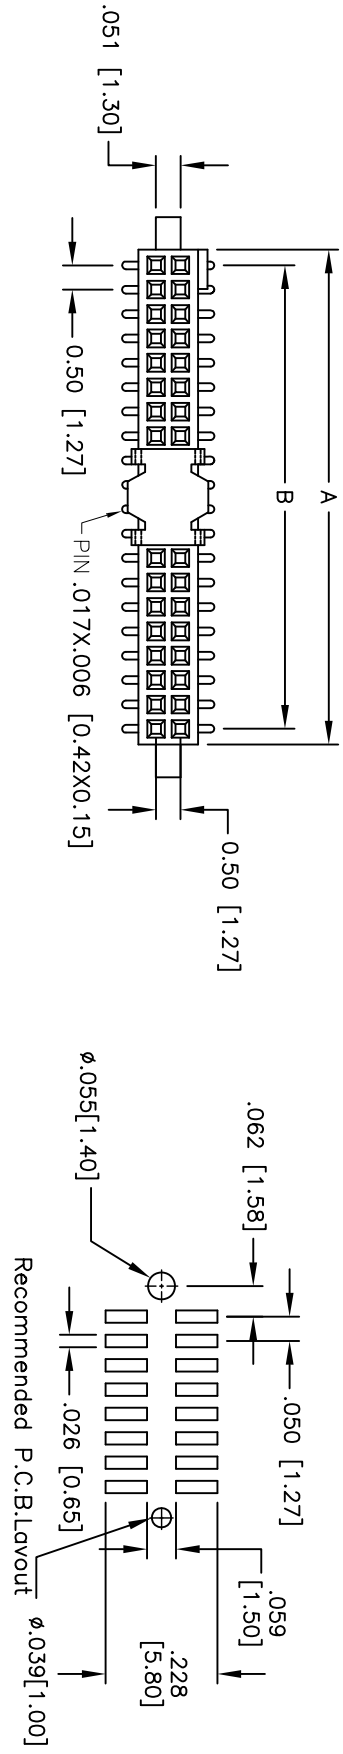

PACKAGED ON TAPE & REEL

Positions: 02 thru 80
 A = .050 [1.27] x No. of Positions per Row + .018 [0.46]
 B = .050 [1.27] x No. of Spaces
 C = .050 [1.27] x No. of Positions + .074 [1.88]

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .050 X .050 DUAL ROW RECEPTACLE STRIP
 .173 [4.40] HEIGHT, SURFACE MOUNT

SPECIFICATIONS:
 Material: Insulator: Hi-temperatureplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating: Gold flash over Nickel underplate on mating area, Tin over Copper underplate on SMT tails
 Electrical: Operating voltage: 250 VAC max.
 Current rating: 1 Amp max.
 Contact resistance: 20 mohms max. initial
 Insulation resistance: 5,000 Mohms min.
 Dielectric withstanding voltage: 300 VAC for 1 minute
 Temperature Rating: Operating temperature: -40°C to +105°C
 Environmental: Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES EXCEPT AS NOTED INCHES		HOLE SIZES		DATE	
.X	± .10	ØXX	± .10	ØXX	± .10		
.XX	± .020	ØXXX	± .015	ØXXX	± .010		
.XXX	± .015	ØXXXX	± .010				
APPROVALS							
DRAWN	AY	7/27/10					
CHECKED	AH	7/27/10					
APPROVED							
SIZE	PART NO.	TITLE					
X	HRS-2H-XX-SG-SMT-P-PP-TR	.050 X .050 DUAL ROW RECEPTACLE STRIP .173 [4.40] HEIGHT, SURFACE MOUNT					
REF: S00032T	SCALE: NTS	REV.					
		SHEET 1 OF 1					