

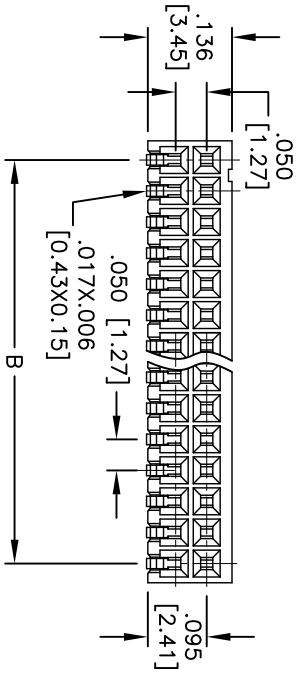
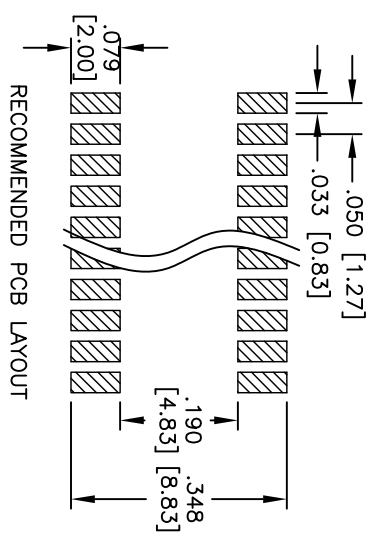


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/10/10	

APPROVED: _____
 DATE: _____ TITLE: _____

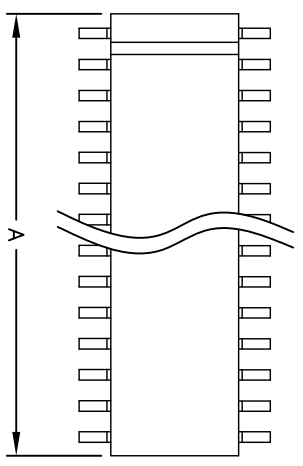

SPECIFICATIONS:

Material: Insulator: LCP, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating: Gold flash over Nickel underplate overall
 Electrical: Current rating: 1 Amp max.
 Contact resistance: 20 mohms max. initial
 Insulation resistance: 1,000 Mohms min.
 Dielectric withstanding: 300V AC
 Temperature Rating: Operating temperature: -40°C to +105°C
 Environmental: Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds

Positions: 04 thru 80
 A = .050 [1.27] x No. of Positions per Row + .012 [0.30]
 B = .050 [1.27] x No. of Spaces

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

.050X.050 DUAL ROW RECEPTACLE STRIP
 SIDE ENTRY, GOLD PLATED, SMT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
.X	± .10	ØXX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010
APPROVALS		DATE	
DRAWN	AY	12/10/10	
CHECKED	AH	12/10/10	
APPROVED			
SIZE	PART NO.	REV.	
X	HRSS2BR-XX-G-SMT		
REF:	S00032T	SCALE:	NTS
		SHEET	1 OF 1

