
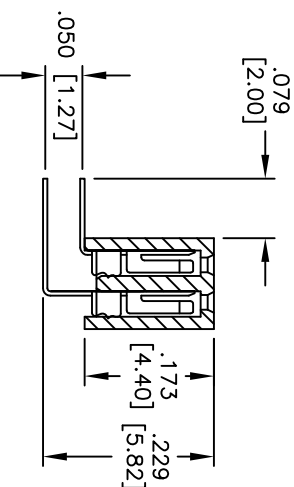
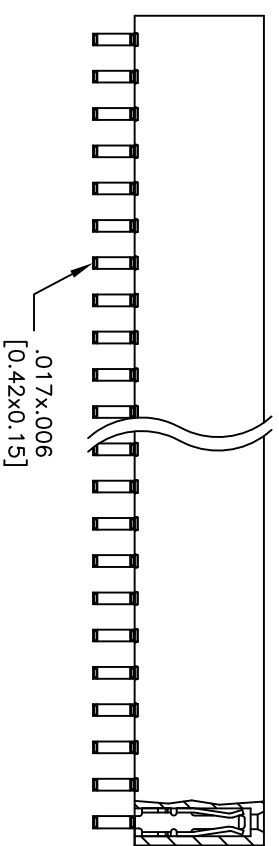
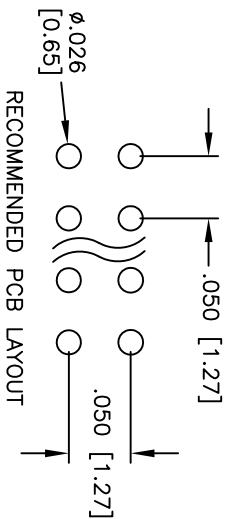


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/21/10	

APPROVED: _____
 DATE: _____ TITLE: _____

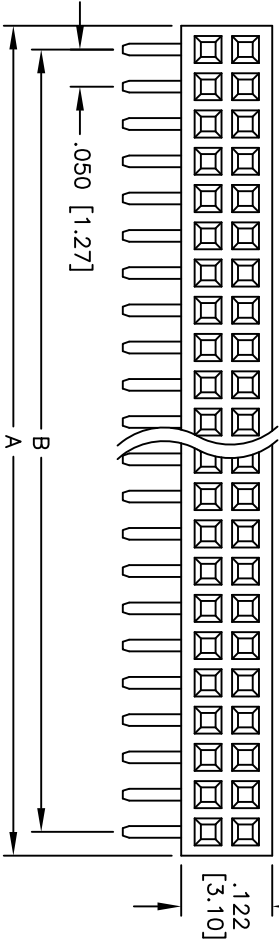

SPECIFICATIONS:
 Material: Insulator: PBT, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating: Gold flash over Nickel underplate overall

Positions: 04 thru 100
 A = .050 [1.27] x No. of Positions per row + .014 [0.35]
 B = .050 [1.27] x No. of Spaces

Electrical:
 Current rating: 1 Amp max.
 Contact resistance: 20 mohms max. initial
 Insulation resistance: 1000 Mohms min.
 Dielectric withstanding: 300 VAC
 Temperature Rating: Operating temperature: -40°C to +105°C

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE IN INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLE SIZES
 .X ± .10 ØXX ± .10
 .XX ± .020 ØXXX ± .015
 .XXX ± .015 ØXXXX ± .010

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710



Environmental: Lead free, RoHS compliant
 Recommended soldering temp: 235°C for 5 seconds

DRAWN	DY	7/21/10	SIZE	PART NO.	REV.
CHECKED			X	HR2R-XX-G	-
APPROVED			REF: S00032T	SCALE: NTS	SHEET 1 OF 1