
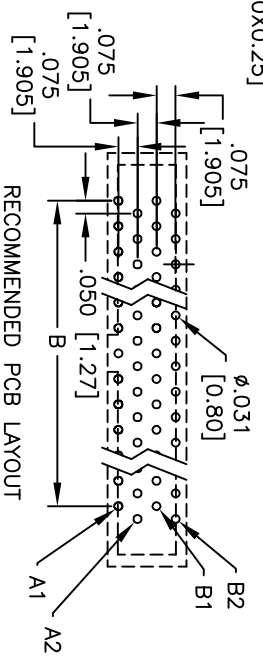
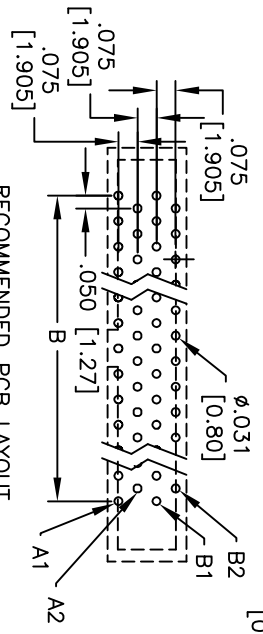
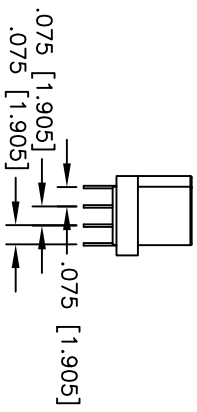
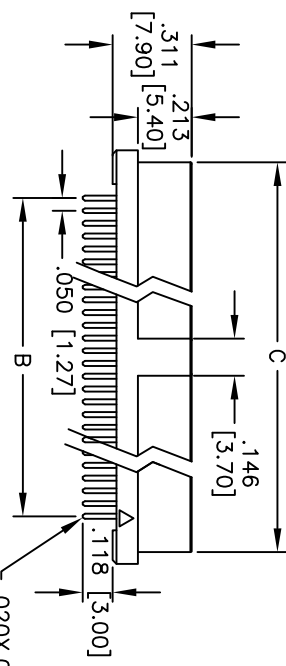



Rev	AWO #	Description	Date	Appr
-		RELEASED	12/14/10	

APPROVED: _____
 DATE: _____ TITLE: _____

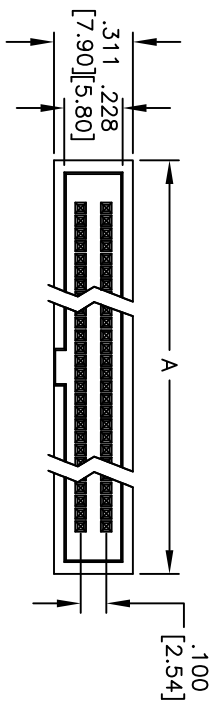

RECOMMENDED PCB LAYOUT
 Top View
 (26,34,50 Position)

RECOMMENDED PCB LAYOUT
 Top View
 (20,32,40,52,60,68,80,100 Position)

Positions: 20 thru 100
 A = .050 [1.27] x No. of Positions /2 + .325 [8.25]
 B = .050 [1.27] x No. of Positions /2 - .050 [1.27]
 C = .050 [1.27] x No. of Positions /2 + .230 [5.85]

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .050 [1.27] X .100 [2.54] PCB SOCKET
 GOLD PLATED

SPECIFICATIONS:
 Material: PBT, glass filled, rated UL 94V-0
 Insulator: Copper alloy
 Plating: Gold flash over Nickel underplate overall
 Electrical: Current rating: 1 Amp max.
 Contact resistance: 20 mohms max
 Insulation resistance: 1,000 Mohms min @ 500 VDC.
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating: Operating temperature: -55°C to +105°C
 Environmental: Lead free, RoHS compliant
 Recommended soldering temp: 235°C for 5 seconds



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN AY	12/14/10
CHECKED VW	12/14/10
APPROVED	

SIZE	PART NO.	REV.
X	HRSB-A-XX-G	-
REF: S0008RT	SCALE: NTS	SHEET 1 OF 1