
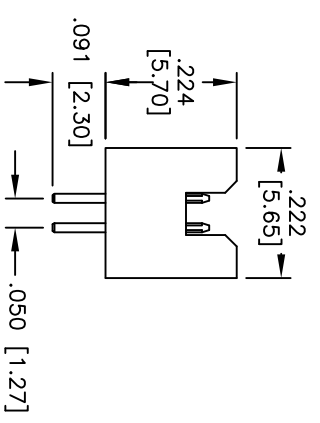
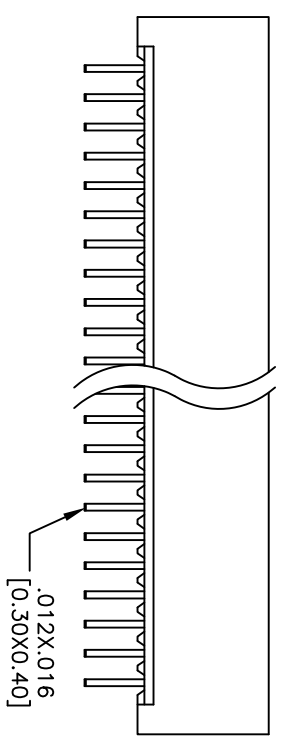
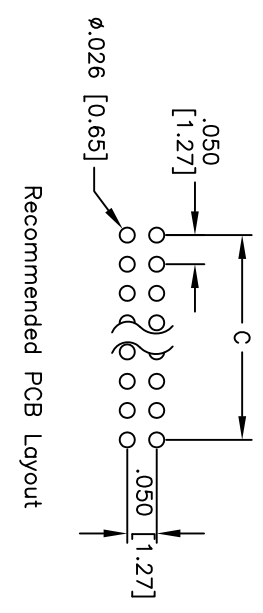


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	03/23/07	
A		REVISED SHAPE	10/09/08	

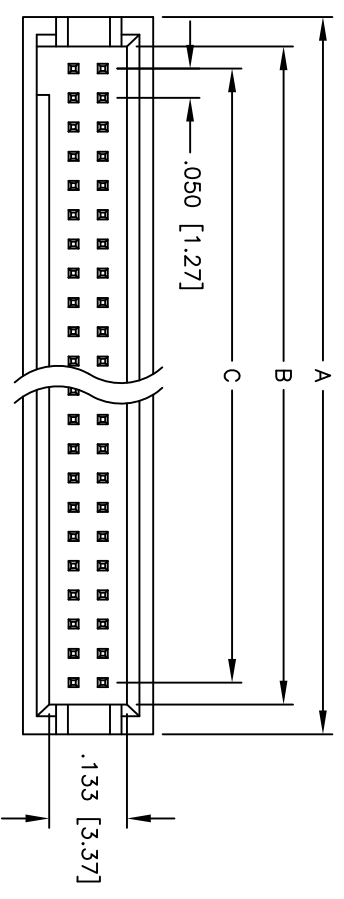

SPECIFICATIONS:
 Material: Nylon 6T, rated UL 94V-0
 Insulator color: Black
 Contacts: Copper Alloy
 Plating:
 Gold flash over Nickel underplate on contact area,
 Tin over Copper underplate on tails.
 Electrical:

Current rating: 1 Amp max.
 Contact resistance: 20 mohms max. initial
 Insulation resistance: 1,000 Mohms min.
 Dielectric withstanding voltage: 300 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant.



Recommended soldering temp: 235°C for 5 seconds

A = .050 [1.27] x No. of Positions Per Row + .126 [3.20]
 B = .050 [1.27] x No. of Positions Per Row + .024 [0.60]
 C = .050 [1.27] x No. of Spaces Per Row

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

APPROVALS: _____ DATE: _____

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .050 [1.27] PITCH SHROUDED MALE HEADER
 DUAL ROW DIP TYPE, SELECTIVE GOLD PLATED

DRAWN	BW	3/23/07	SIZE	PART NO.	REV.
CHECKED			X	HSH-XX-SG	A
APPROVED			REF:	SCALE: NTS	SHEET 1 OF 1

6 5 4 3 2 1