
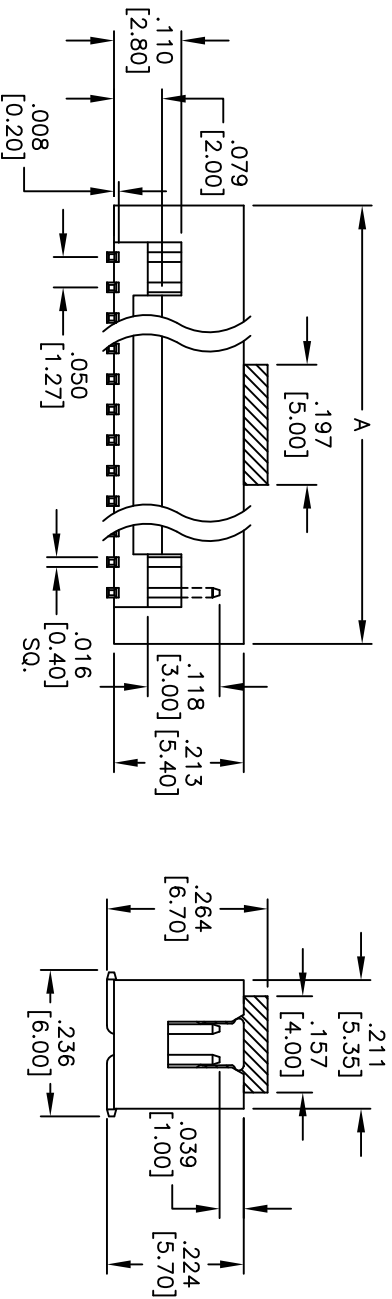


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/18/09	

APPROVED: _____
 DATE: _____ TITLE: _____

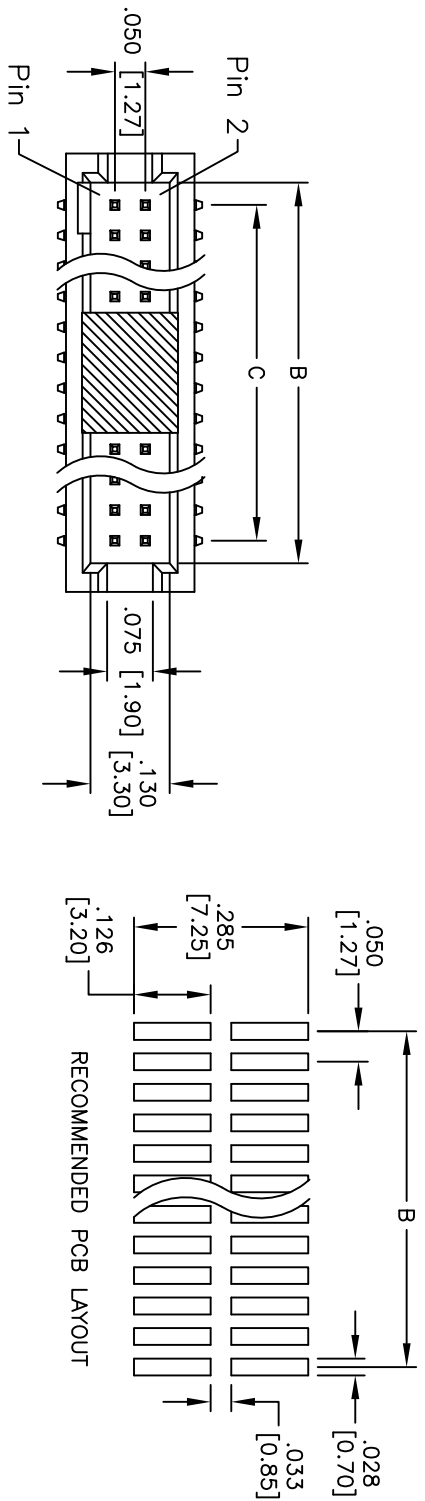

PACKAGED ON TAPE & REEL

SPECIFICATIONS:
 Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating: 30U" Gold flash over Nickel underplate on contact area, Tin over Copper underplate on tails.

Electrical:
 Current rating: 1 Amp max.
 Contact resistance: 10 mohms max. initial
 Insulation resistance: 5,000 Mohms min.
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating: Operating temperature: -40°C to +105°C

Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 260° for 5 sec.

Positions: 10 thru 100
 A = .050 [1.27] x No. of Spaces + .168 [4.27]
 B = .050 [1.27] x No. of Spaces + .074 [1.87]
 C = .050 [1.27] x No. of Spaces

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

.050 [1.27] SHROUDED HEADER, VERTICAL
 SMT TYPE, 30U" SEL GOLD PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]		TITLE .050 [1.27] SHROUDED HEADER, VERTICAL SMT TYPE, 30U" SEL GOLD PLATED	
TOLERANCES: EXCEPT AS NOTED		PART NO. HSH-XX-WSG-SMT-1P-PP-T/R	
INCHES		SIZE X	
.X ± .10		DRAWN DY	
.XX ± .020		CHECKED	
.XXX ± .015		APPROVED	
.XXX ± .015		DATE 9/18/09	
APPROVALS		REF: S0009T	
SCALE: NTS		SHEET 1 OF 1	

