


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/24/09	

APPROVED: _____
 DATE: _____ TITLE: _____

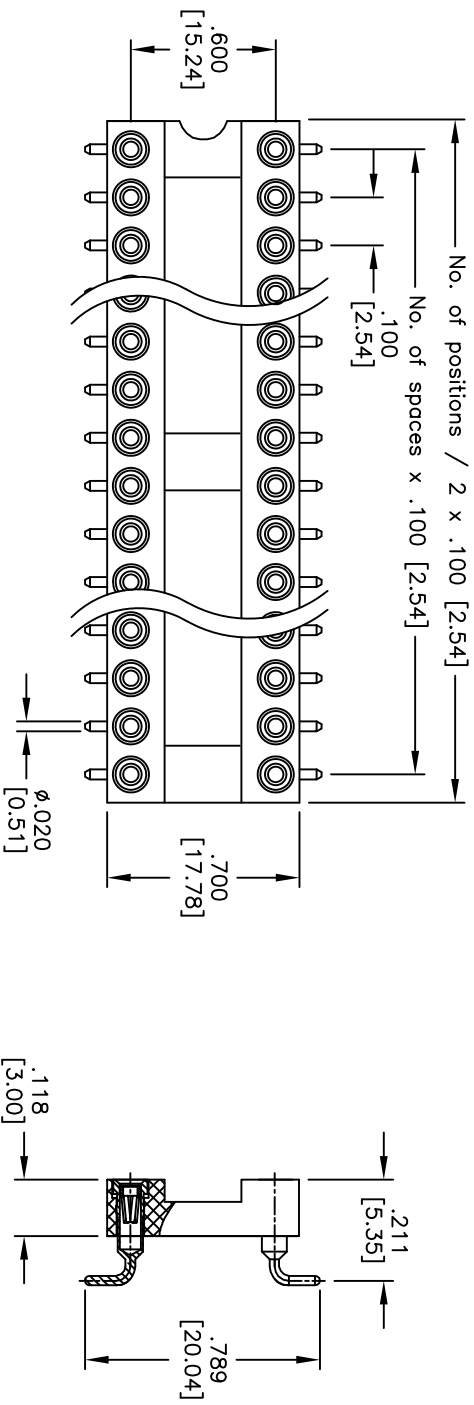

SPECIFICATIONS:
 Material: Insulator: Hi-Temp Nylon, Glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Beryllium Copper
 Outer Pin: Brass, Nickel plated
 Plating: Gold flash over Nickel underplate on inner contact, Tin over Copper underplate on outer sleeve
 Electrical: Current rating: 3 Amp max
 Contact resistance: 4 mohms max
 Insulation resistance: 10000 Mohms min @ 500 VDC
 Rated voltage: 100 VRMS/ 150VDC
 Temperature Rating: Operating temperature: -55°C to +105°C
 Environmental: Lead free, RoHS compliant.
 Recommended soldering temp: 260°C for 5 sec.

Positions: 06 thru 52



ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

SCREW MACHINE IC SOCKET

600" ROW SPACING, SMT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
INCHES	±.10	HOLES	±.10
.XX	±.020	ØXXX	±.015
.XXX	±.015	ØXXX	±.010
APPROVALS		DATE	
DRAWN	DY	7/24/09	
CHECKED	LW	7/30/10	
APPROVED			
TITLE		SIZE	PART NO.
SCREW MACHINE IC SOCKET		X	ICM-6XX-SMT-GT-HT
REF: S0007T		SCALE: NTS	SHEET 1 OF 1