
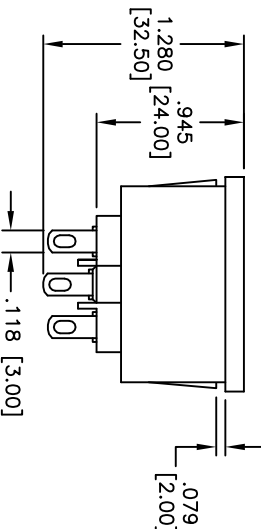
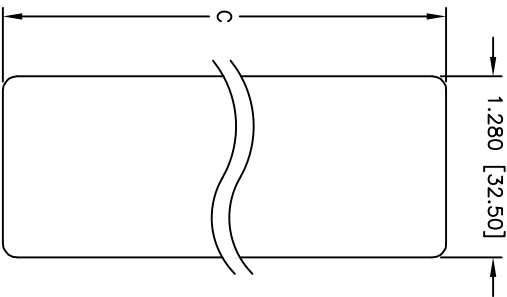
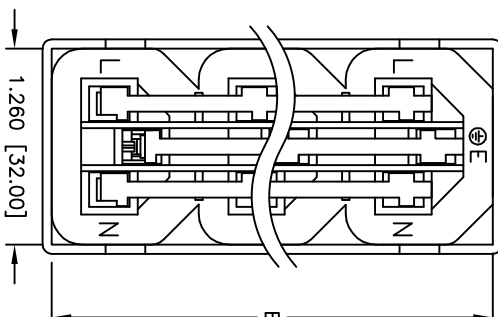
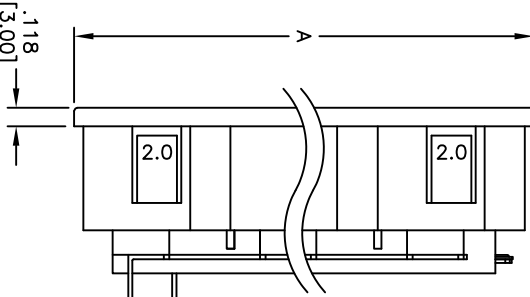


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/19/10	

APPROVED: _____
 DATE: _____ TITLE: _____

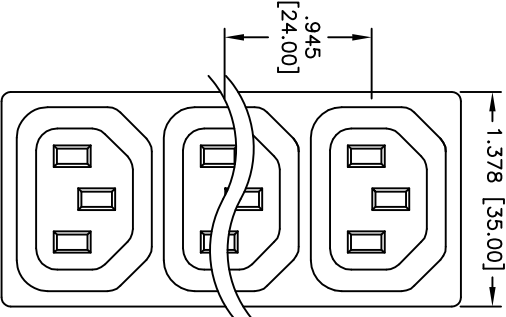

PART NUMBER	PORTS	DIMENSIONS		
		A	B	C
IEC-D-S2-200	2	2.008 [51.00]	1.890 [48.00]	1.902 [48.30]
IEC-D-S3-200	3	2.953 [75.00]	2.835 [72.00]	2.846 [72.30]
IEC-D-S4-200	4	3.898 [99.00]	3.780 [96.00]	3.791 [96.30]
IEC-D-S5-200	5	4.843 [123.00]	4.724 [120.00]	4.736 [120.30]
IEC-D-S6-200	6	5.787 [147.00]	5.669 [144.00]	5.681 [144.30]
IEC-D-S7-200	7	6.732 [171.00]	6.614 [168.00]	6.626 [168.30]

RECOMMENDED PANEL CUT-OUT

SPECIFICATIONS:

Material: Nylon 66, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze

Plating: Tin over Copper underplate overall

Electrical:
 Operating voltage: 250 VAC
 Current rating: UL & CSA: 15 Amps max
 VDE: 10 Amps max

Insulation resistance: 100 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 2,000 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -25°C to +70°C

Environmental:
 Lead free, RoHS compliant
 Recommended hand soldering temp: 235°C for 5 seconds



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES: .X ±.10 ØXX ±.015
 .XX ±.020 ØXXX ±.010
 .XXX ±.015
 APPROVALS: _____ DATE: _____

DRAWN	DY	3/19/10
CHECKED		
APPROVED		

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: IEC FEMALE OUTLET STRIP
 SNAP-IN PANEL MOUNT

SIZE	PART NO.	REV.
X	IEC-D-SX-200	-
REF:	S0080T	
SCALE:	NTS	
SHEET	1 OF 1	