

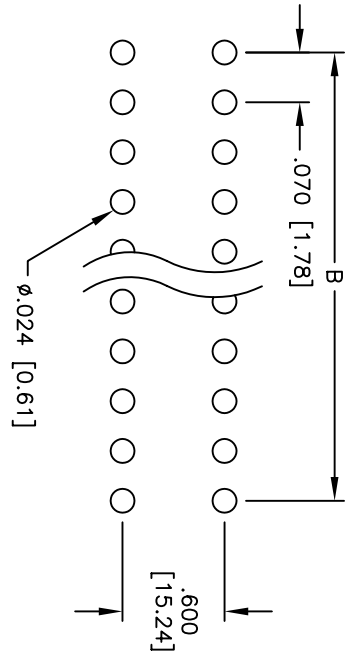
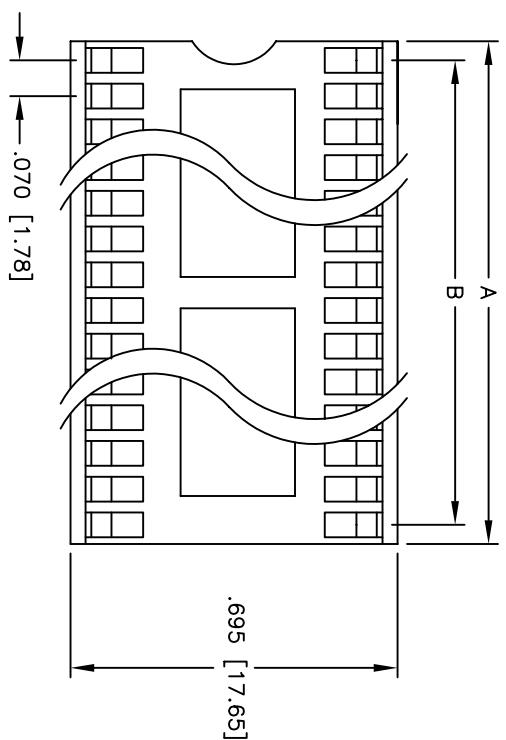


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/28/05	

APPROVED: _____
 DATE: _____ TITLE: _____

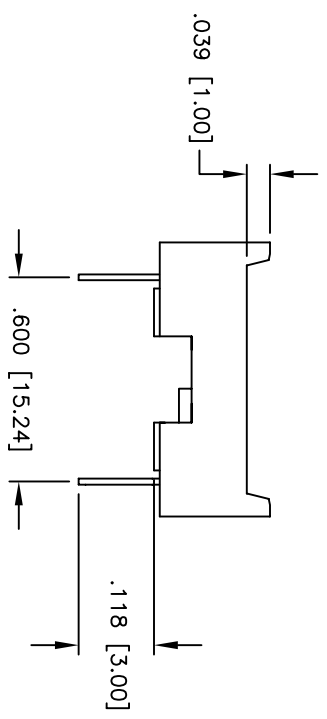

PCB LAYOUT

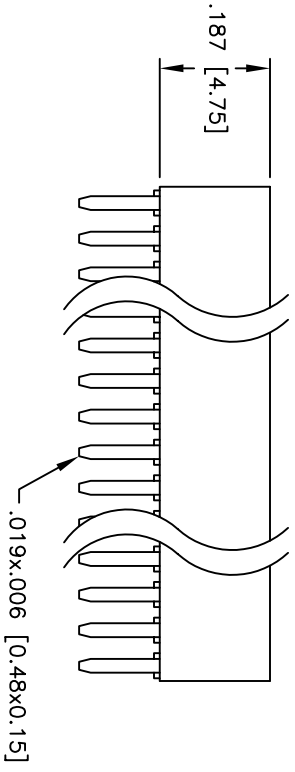

SPECIFICATIONS:

- Material: PBT, Glass reinforced, rated UL 94V-0
- Insulator color: Black
- Contacts: Phosphor Bronze
- Plating: Tin over Copper underplate overall
- Electrical:
 - Operating voltage: 250 VAC max
 - Current rating: 1 Amp max
 - Contact resistance: 20 mohms max initial
 - Insulation resistance: 5,000 Mohms min
 - Dielectric withstanding voltage: 1,000 VAC for 1 minute
- Temperature Rating:
 - Operating temperature: -55°C to +105°C
- Environmental:
 - Lead free, RoHS compliant



Positions: 40, 42, 48, 52, 56, & 64
 A = .070 [1.78] x No. of Positions Per Row
 B = .070 [1.78] x No. of Spaces Per Row

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLDS	INCHES	HOLDS
.X ± .10	ØXX	± .10	
.XX ± .020	ØXXX	± .015	
.XXX ± .015	ØXXXX	± .010	

APPROVALS: _____ DATE: _____

DRAWN	SS	1/28/05
CHECKED		
APPROVED		

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: IC SHRINK DIP SOCKET
 .600" ROW SPACING, TIN PLATED

SIZE: X PART NO.: ISD-6XX-T
 SCALE: NTS SHEET 1 OF 1