
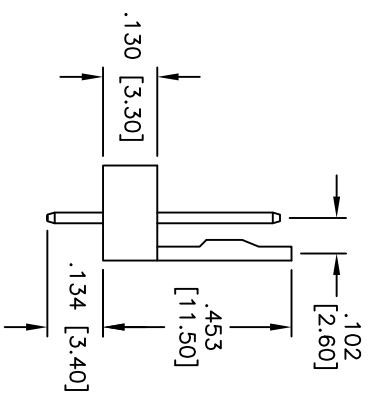
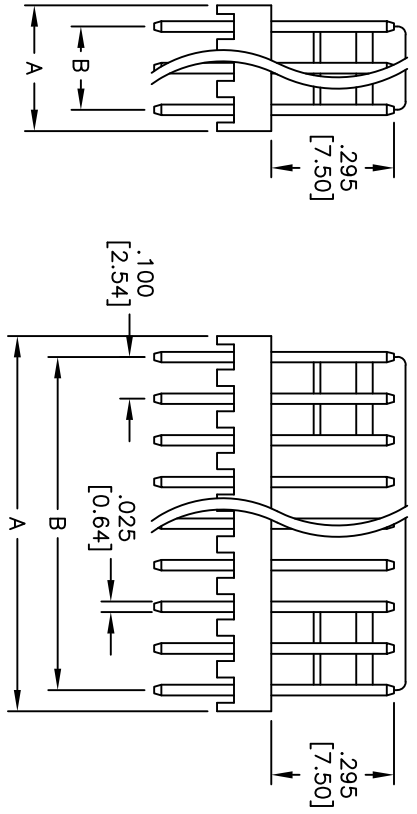
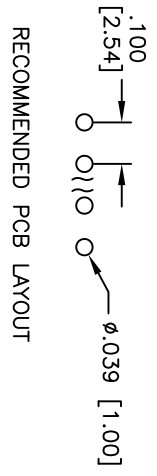


Rev	AWO #	Description	Date	Appr
-		RELEASED	2/21/11	

APPROVED: _____
 DATE: _____ TITLE: _____

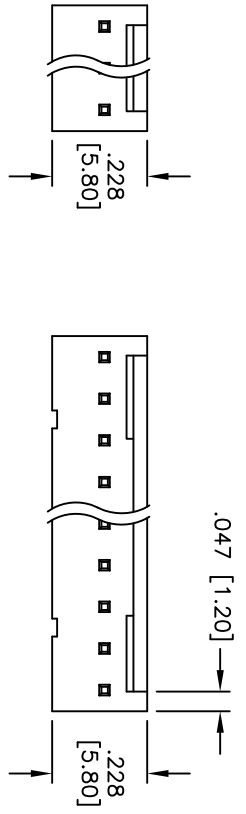

SPECIFICATIONS:

Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Natural
 Contacts: Brass
 Plating: Tin over Copper underplate overall

Electrical: Operating voltage: 250 VAC max
 Current rating: 2 Amps max

Contact resistance: 20 mohms max
 Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1,500 VAC for 1 minute
 Temperature Rating: Operating temperature: -25°C to +85°C

Environmental: Lead free, RoHS compliant



Recommended soldering temp: 260°C for 5 seconds

Positions: 2 thru 20
 A = .100 [2.54] x No. of Positions
 B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 [2.54] LOCKING HEADER STRAIGHT, PCB
 SIZE: X
 PART NO.: LHA-XX-TS-V0-HT

REF: S00015T	SCALE: NTS	SHEET 1 OF 1
--------------	------------	--------------