

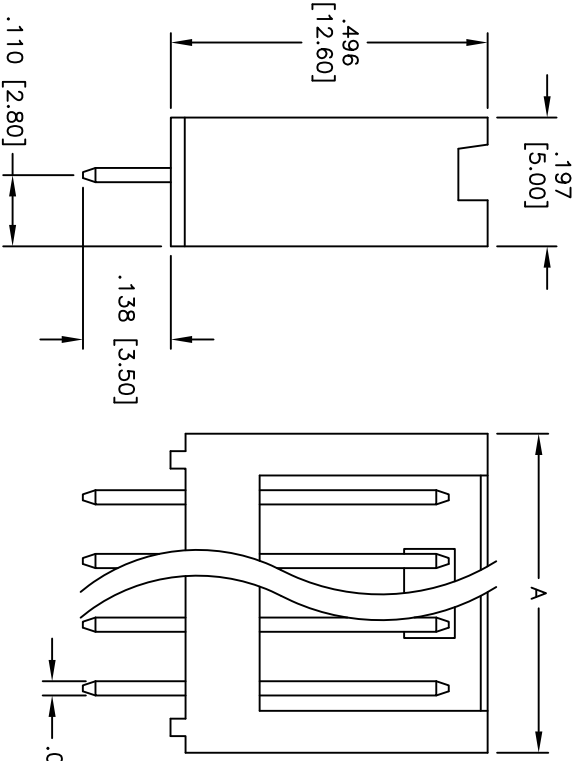


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/18/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

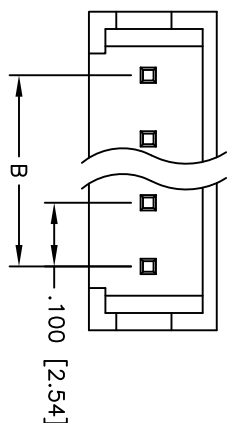

RECOMMENDED PCB LAYOUT

Positions: 2 thru 12  
 A = .100 [2.54] x No. of Spaces +.200 [5.08]  
 B = .100 [2.54] x No. of Spaces

**SPECIFICATIONS:**

- Material: Insulator: PBT, rated UL 94V-0
- Insulator color: Orange, Pantone color P156C
- Contacts: Brass
- Plating: Tin over Copper underplate overall
- Electrical: Operating voltage: 250V AC,DC
- Current rating: 3A AC,DC
- Contact resistance: 20 mohms max
- Withstanding voltage: 1,000 VAC for 1 minute
- Temperature Rating: Operating temperature: -25°C to +85°C
- Environmental: Lead free, RoHS compliant
- Recommended soldering temp: 235°C for 5 seconds



UNLESS OTHERWISE SPECIFIED	
ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	MM
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 [2.54] LOCKING HEADER, STRAIGHT, PCB

SIZE	PART NO.	REV.
X	LHAB-XX-TS-V0	-

REF: S00723T SCALE: NTS SHEET 1 OF 1