


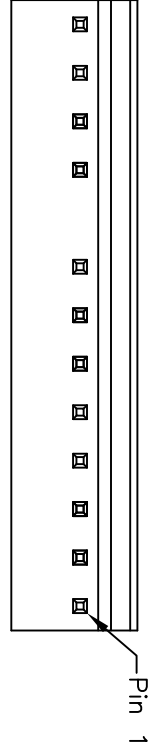


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/25/09	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

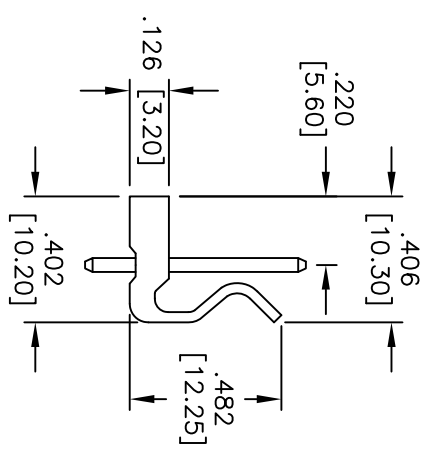

RECOMMENDED PCB LAYOUT

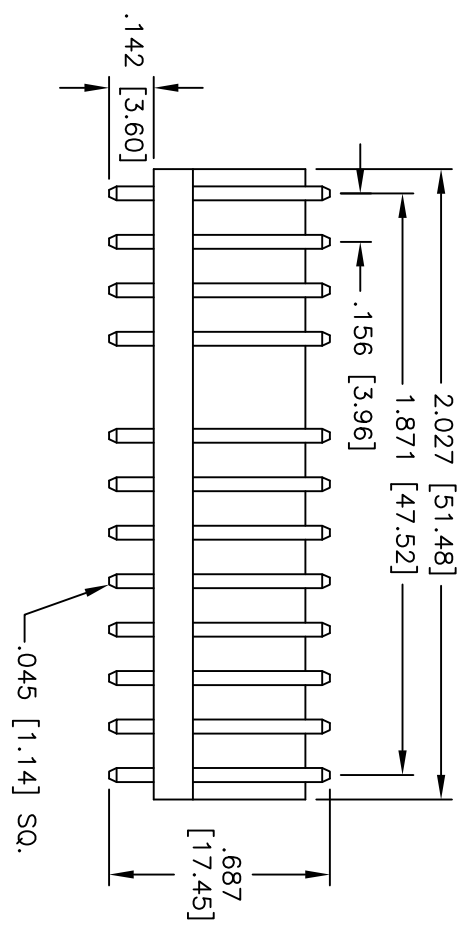

**SPECIFICATIONS:**

Material: Nylon 66, rated UL 94V-2  
 Insulator color: Natural  
 Contacts: Brass  
 Plating: Gold flash over Copper underplate overall  
 Electrical:  
 Operating voltage: 250 VAC max  
 Current rating: 7 Amps max  
 Contact resistance: 10 Mohms max  
 Dielectric withstanding voltage: 1500 VAC for 1 minute  
 Temperature Rating: Operating temperature: -40°C to +105°C

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .156 [3.96] LOCKING HEADER, PCB, STRAIGHT  
 GOLD FLASH PLATED, REMOVE PIN #9

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		INCHES		HOLE SIZE		DATE	
.X	± .10	ØXX	± .10				
.XX	± .020	ØXXX	± .015				
.XXX	± .015	ØXXXX	± .010				
DRAWN		DY		11/25/09		SIZE	
CHECKED						PART NO.	
APPROVED						LHB-13-SA1-G-X09	
REF: S00123T		SCALE: NTS		SHEET 1 OF 1		REV.	

6 5 4 3 2 1