
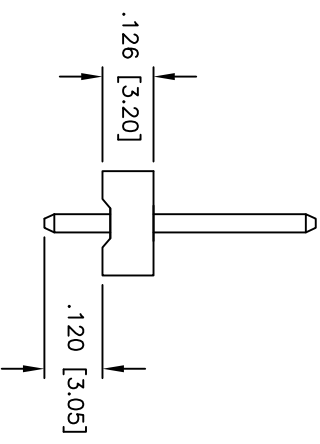
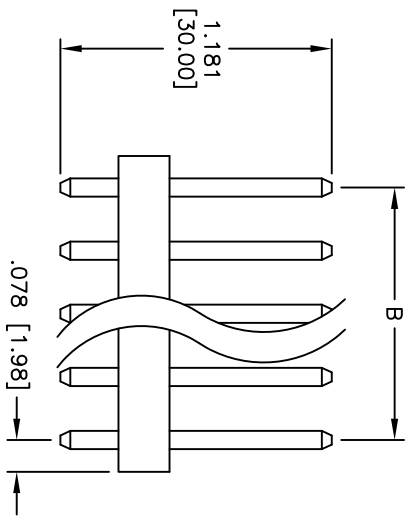
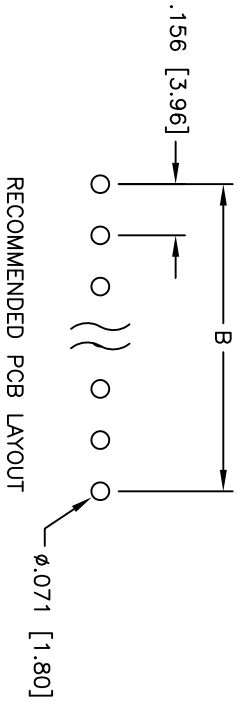


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/11/10	

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

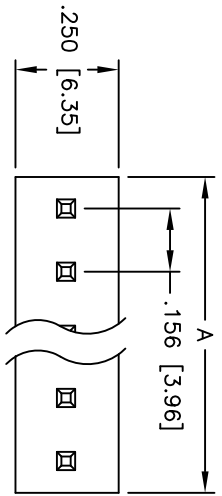

**SPECIFICATIONS:**

Material: Insulator: Nylon 66, rated UL 94V-2  
 Insulator color: White  
 Contacts: Brass

Plating: Tin over Copper underplate overall

Electrical: Operating voltage: 250 VAC max

Current rating: 7 Amps max

Contact resistance: 10 mohms max

Dielectric withstanding voltage: 1,500 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 235°C for 5 seconds

Positions: 2 thru 12  
 A = .156 [3.96] x No. of Positions  
 B = .156 [3.96] x No. of Spaces

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

APPROVALS

DRAWN	AY	10/1/10
CHECKED	AY <td>10/1/10</td>	10/1/10
APPROVED		

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .156 [3.96] POWER HEADER, STRAIGHT  
 WITHOUT LOCK POLARIZER

SIZE	PART NO.	SCALE	SHEET	REV.
X	LHB-XX-SA2-.120/1.181	NIS	1 OF 1	-

