
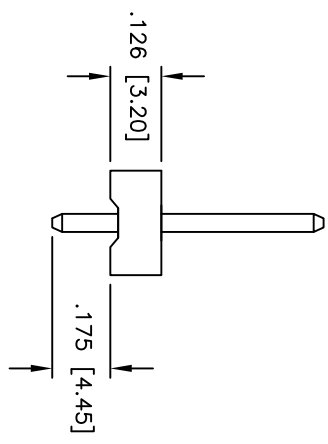
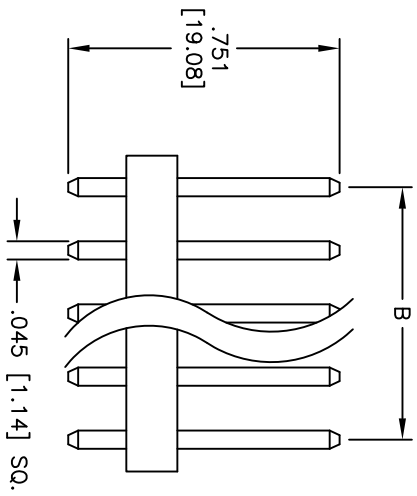
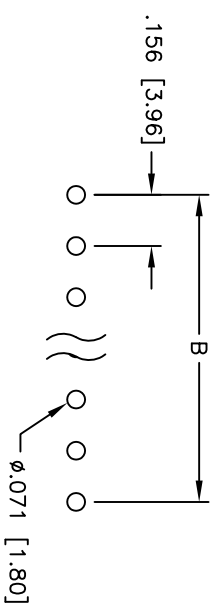


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/17/10	

APPROVED: _____
 DATE: _____ TITLE: _____

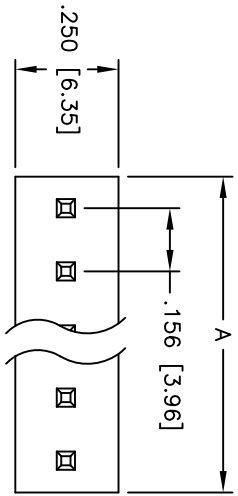

SPECIFICATIONS:

Material: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: White
 Contacts: Brass

Plating: Tin over Copper underplate overall

Operating voltage: 250V AC,DC

Current rating: 7A

Contact resistance: 10 mohms max

Dielectric withstanding voltage: 1,500 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 260°C for 5 seconds



Positions: 2 thru 22
 A = .156 [3.96] x No. of Positions
 B = .156 [3.96] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

APPROVALS: _____ DATE: _____

DRAWN	DY	8/17/10
CHECKED		
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .156 [3.96] POWER HEADER, STRAIGHT
 WITHOUT LOCK POLARIZER

SIZE	PART NO.	REV.
X	LHB-XX-SA2-.175/.751-HT-V0	-
REF: S0023T	SCALE: NTS	SHEET 1 OF 1