
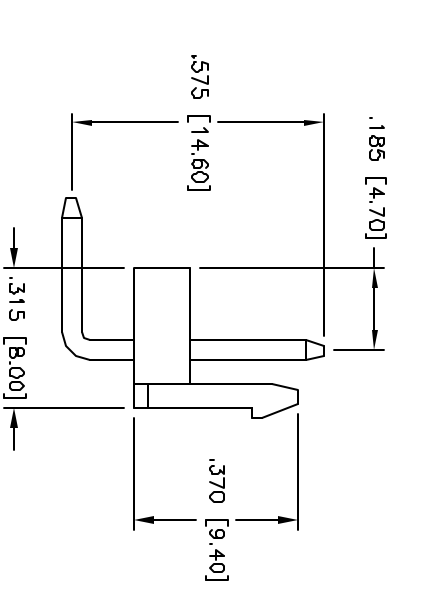
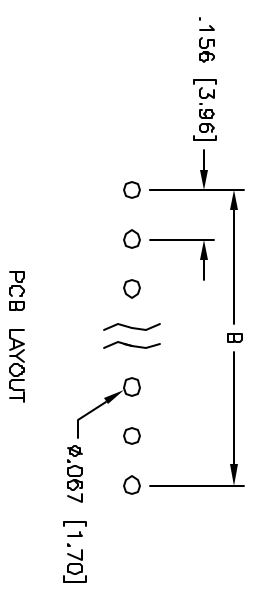
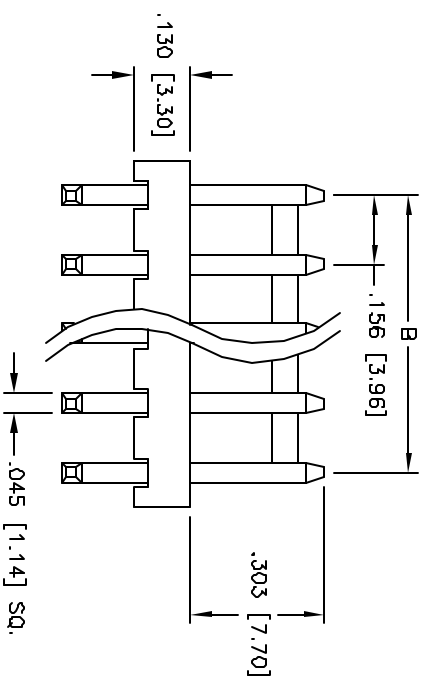


APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/12/05	

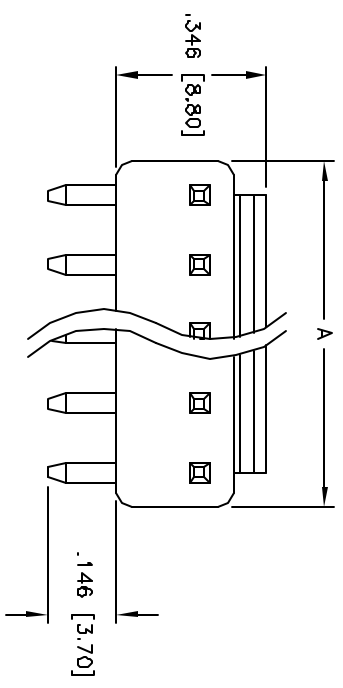

Positions: 2 thru 14  
 A = .156 [3.96] x No. of Positions + .010 [0.25]  
 B = .156 [3.96] x No. of Spaces

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED

INCHES	HILES
X .10	± .10
XX .020	± .010
.XXX ± .015	± .010

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **.156 [3.96] POWER HEADER**  
**RIGHT ANGLE WITH REAR LOCK**

DRAWN	SS	DATE	4/12/05
CHECKED			
APPROVED			

SIZE	PART NO.	SCALE	NTB	SHEET	1 OF 1
X	LHC-XX-983				

**SPECIFICATIONS:**

Material:

Insulator: Nylon 66, rated UL 94V-0

Insulator color: White

Contacts: Brass

Plating:

Tin over Copper underplate overall

Electrical:

Operating voltage: 250 VAC max

Current rating: 5 Amps max

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1,500 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 230°C for 5 seconds

