
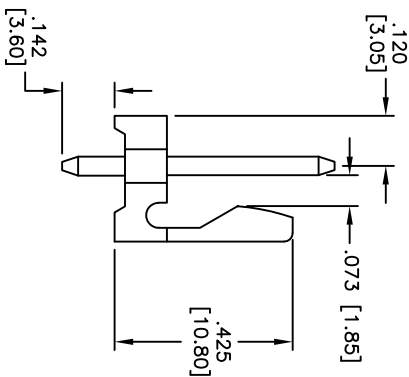
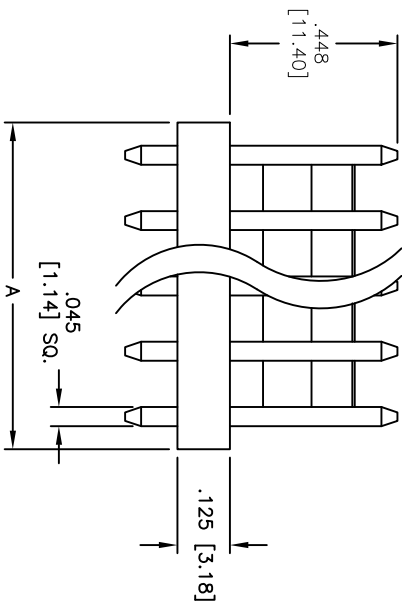


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/4/09	
A		REDRAWN	10/7/10	

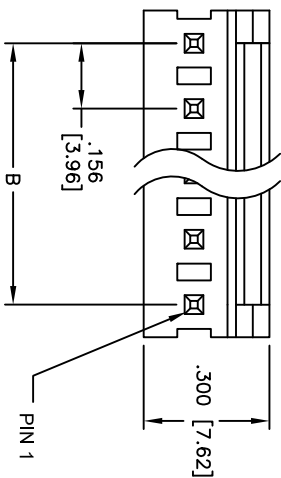

SPECIFICATIONS:

Material: Insulator: Nylon PA66, rated UL 94V-2
 Insulator color: White
 Contacts: Brass

Plating: Tin over Copper underplate overall

Electrical: Current rating: 7 Amps max
 Contact Resistance: 20 mohms max.

Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating: Operating temperature: -40°C to +85°C

Environmental: Lead free, RoHS compliant

Recommended soldering temp: 235°C for 5 seconds



Positions: 2 thru 20
 A = .156 [3.96] x No. of Positions
 B = .156 [3.96] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE IN INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010

APPROVALS	DATE

DRAWN	SS	1/4/09
CHECKED		
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .156 [3.96] WIRE HOUSING, STRAIGHT

SIZE	PART NO.	SCALE	SHEET 1 OF 1
X	LHD-XX-TS	NIS	A