
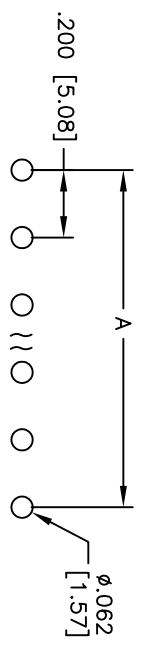

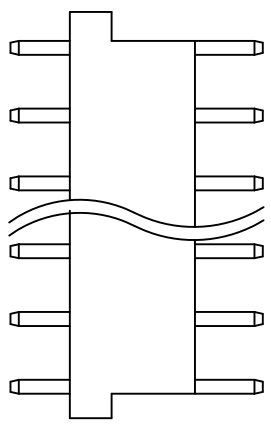
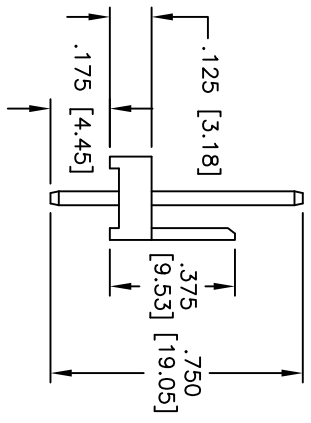
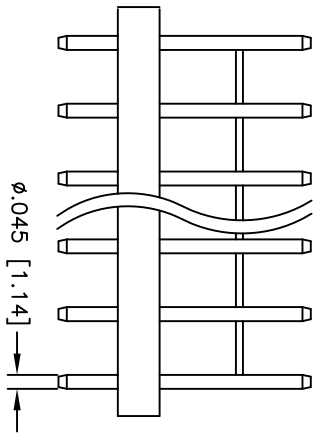


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/06/11	

APPROVED: _____
 DATE: _____ TITLE: _____

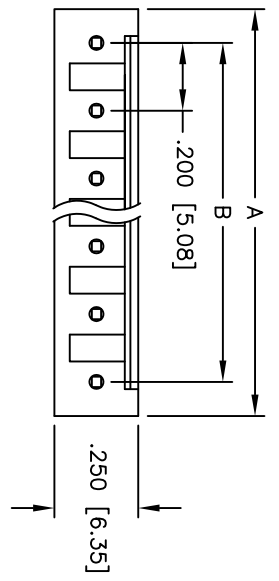

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material: Nylon 66, rated UL 94V-2
 Insulator color: Natural
 Contacts: Brass
 Plating: Tin over Nickel underplate overall

Operating voltage: 250V AC/DC
 Current rating: 3A AC/DC
 Environmental: Lead free, RoHS compliant



Recommended soldering temp: 235°C for 5 seconds

Positions: 2 thru 25
 A = .200 [5.08] x No. of Positions
 B = .200 [5.08] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE IN INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLE SIZE

.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .200 [5.08] WIRE TO BOARD, STRAIGHT
 ROUND PINS

DRAWN	DY	1/06/11	SIZE	PART NO.	REV.
CHECKED			X	LHN-XX-TS-RP	-
APPROVED			REF: S00123T	SCALE: NTS	SHEET 1 OF 1