
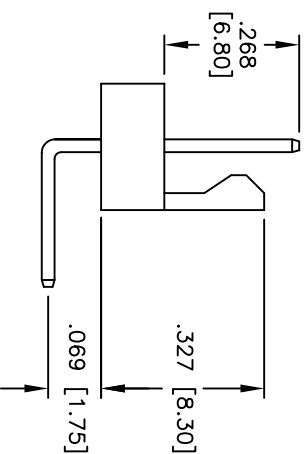
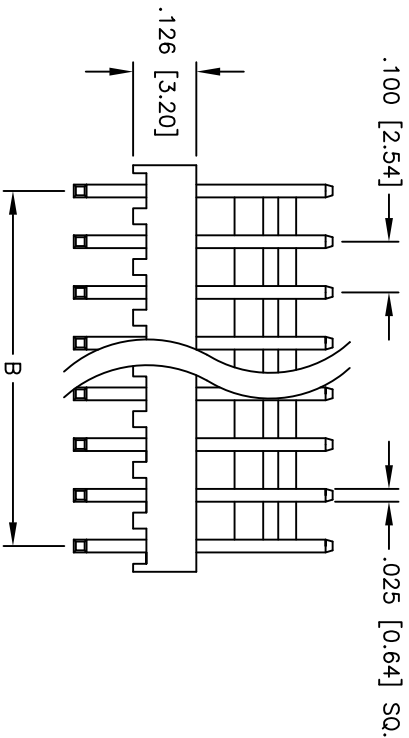
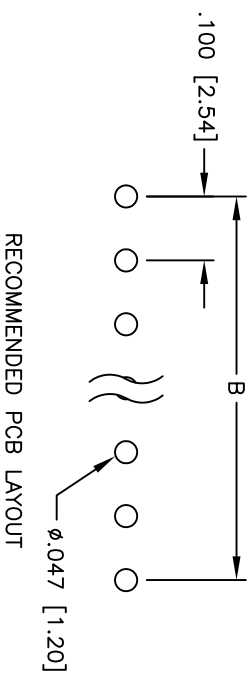


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/20/08	BAS
A		REDRAWN	4/21/10	

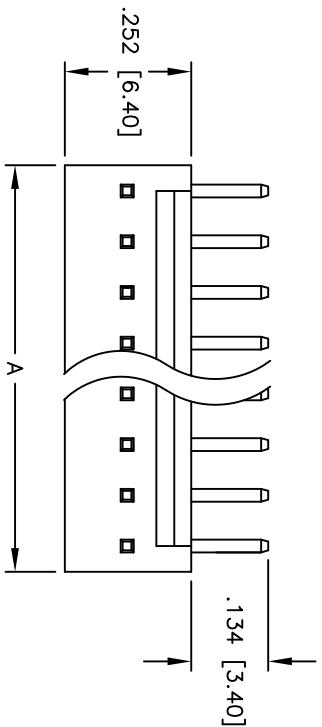

**SPECIFICATIONS:**

- Material: Insulator: Nylon 66, rated UL 94V-2
- Insulator color: Brown
- Contacts: Brass
- Plating: Tin over Copper underplate overall
- Electrical: Operating voltage: 250 VAC max
- Current rating: 3 Amps max
- Dielectric withstanding voltage: 1,500 VAC for 1 minute
- Temperature Rating: Operating temperature: -40°C to +105°C
- Environmental: Lead free, ROHS compliant
- Recommended soldering temp: 235°C for 5 seconds

Positions: 2 thru 12  
 A = .100 [2.54] x No. of Positions  
 B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED	
ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	DRY
CHECKED	BAS
APPROVED	8/20/08

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 [2.54] LOCKING HEADER, SHORT BACK  
 RIGHT ANGLE, TIN PLATED, PCB

SIZE	PART NO.	REV.
X	LHS-XX-TRB	A
REF: S00123T	SCALE: NTS	SHEET 1 OF 1

