
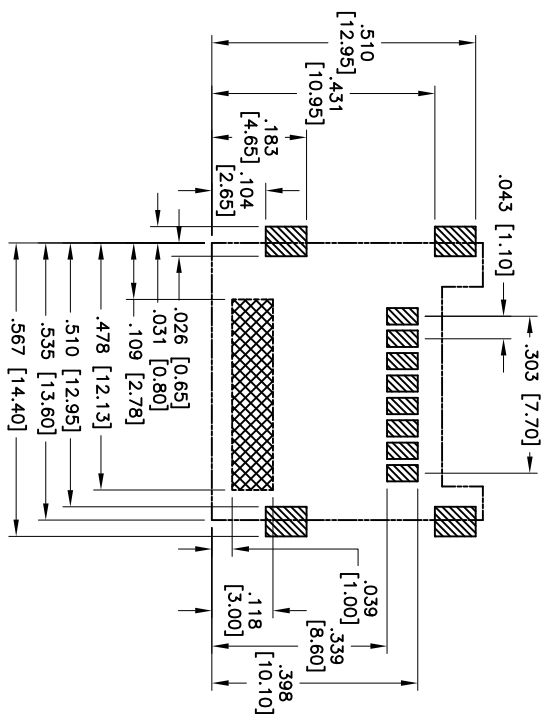
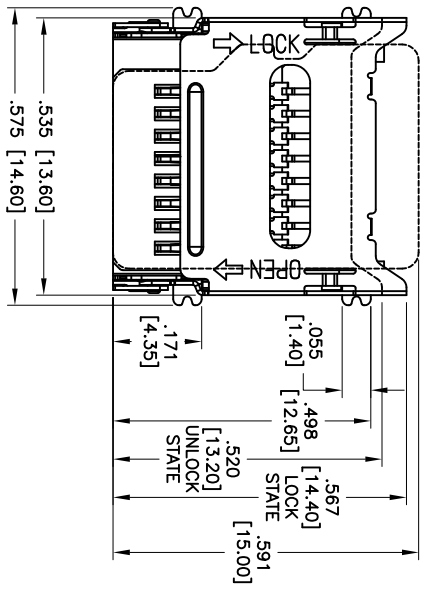
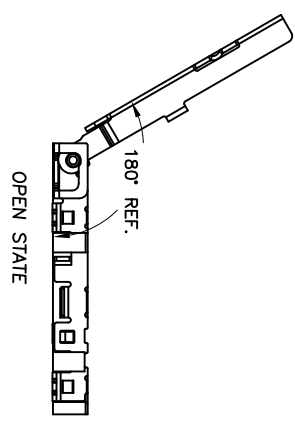


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/12/08	

APPROVED: _____
 DATE: _____ TITLE: _____

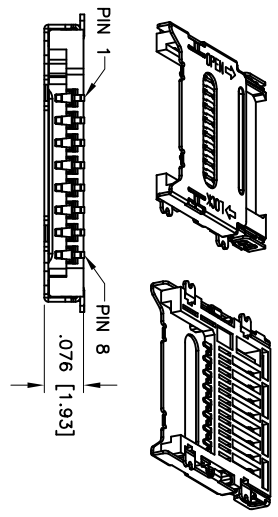

Recommended PCB Layout

SPECIFICATIONS:

- Material: Insulator: Hi-temp plastic, rated UL 94V-0
- Insulator color: Black
- Terminal: Copper alloy
- Fork: Stainless Steel
- Shell: Stainless Steel
- Plating: 10U" Gold over Nickel underplate on contact area, Tin over Copper underplate on SMT tails
- Electrical: Current rating: 0.5 Amps max
- Contact resistance: 30 mohms max
- Insulation resistance: 1000 Mohms min @ 500V DC
- Dielectric withstanding voltage: 500 VAC for 1 minute
- Temperature Rating: Operating temperature: -25°C to +85°C
- Environmental: Lead free, RoHS compliant.
- Recommended soldering temp: 260°C for 5 sec.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES: .X ± .10
 .XX ± .020
 .XXX ± .015
 HOLES: Ø.X ± .10
 Ø.XXX ± .015

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MICRO SD SOCKET, HINGE TYPE

APPROVALS	DATE	SIZE	PART NO.	REV.
DRAWN	DY	9/12/08		
CHECKED				
APPROVED				
		X	MCSP-08-A-SG-HC	
		REF: S00009T	SCALE: NTS	SHEET 1 OF 1