


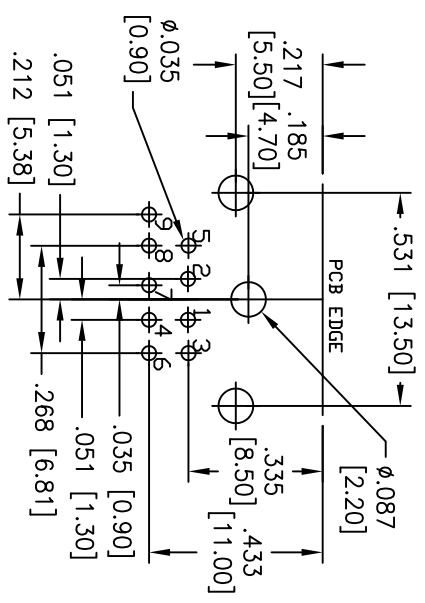


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/7/04	
A		ADDED HOLD DIM.	5/14/04	
B		REDRAWN	1/17/11	

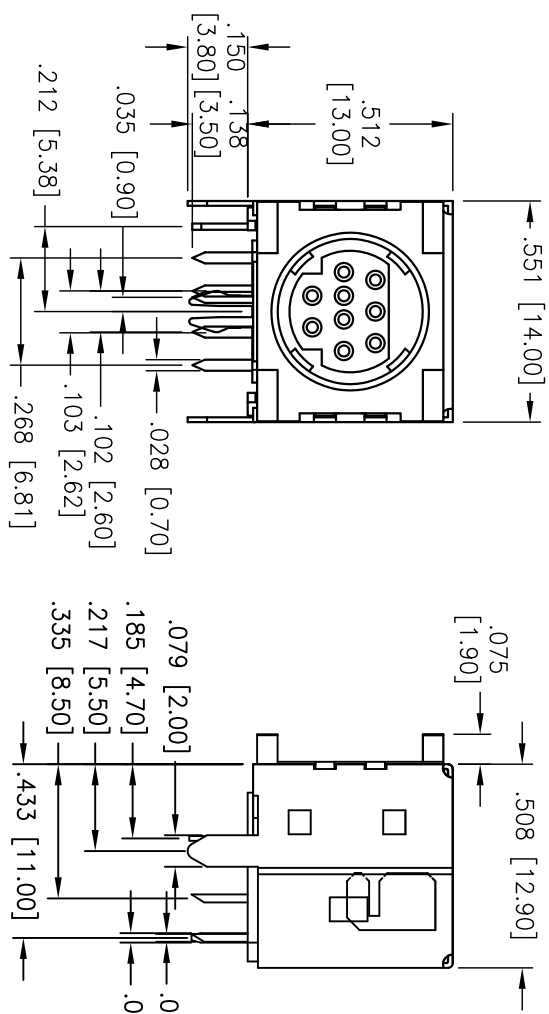

SPECIFICATIONS:

Material:
 Insulator: PBT, glass filled, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Shield: Brass, Tin Plated
 Plating:
 Gold over Nickel underplate on contact area,
 Tin over Copper underplate on tails.
Electrical:
 Current rating: 1 Amp @ 100V AC,
 2 Amps @ 12V DC.
 Insulation resistance: 100 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 250 VAC for 1 minute
Environmental:
 Operating temperature: -25°C to + 70°C
 Environmental:
 Lead free, RoHS Compliant
 Recommended soldering temp: 235°C for 5 seconds



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MM [INCHES]
 TOLERANCES: EXCEPT AS NOTED
 INCHES
 .XX ± .10
 .XXX ± .020
 .XXX ± .015
 .XXX ± .010

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

APPROVALS	DATE	TITLE	SIZE	PART NO.	SCALE	SHEET	REV.
DRAWN	SS	5/7/04	X	MDJ-009-FS-PG4	NTS	1 OF 1	B
CHECKED							
APPROVED							