


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/30/05	

APPROVED: _____
 DATE: _____ TITLE: _____

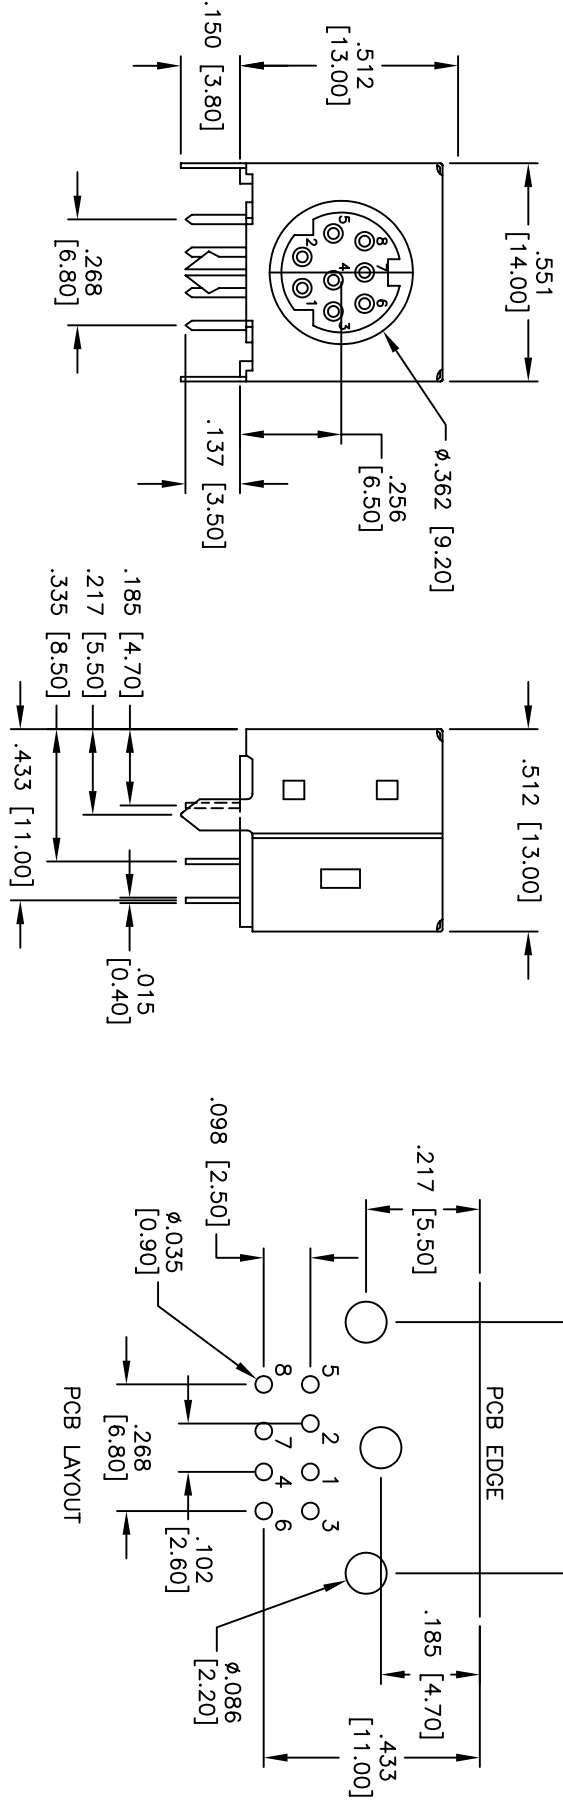

MATING FACE CONFIGURATIONS

MDJ-003-FS-GRN	MDJ-004-FS-GRN	MDJ-005-FS-GRN	MDJ-006-FS-GRN	MDJ-007-FS-GRN	MDJ-008-FS-GRN
----------------	----------------	----------------	----------------	----------------	----------------

SPECIFICATIONS:

Material:
 Insulator: PBT, glass filled, rated UL 94V-0
 Insulator color: Green, Pantone color 3395C
 Contacts: Phosphor Bronze
 Shield: Copper Alloy, Tin plated
 Plating:
 Gold over Nickel underplate on contact area, Tin over
 Copper underplate on tails

Electrical:

Operating voltage: 100 VAC/12 VDC max.
 Current rating: 1 Amp max./2 Amps max.
 Contact resistance: 30 mohms max. initial
 Insulation resistance: 100 Mohms min.
 Dielectric withstanding voltage: 250 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -25°C to +70°C
 Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 235 for 5 sec.

A

B

C

D

A

B

C

D

6

5

4

3

2

1



ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLES

X	± .10	ØXX	± .10
XX	± .020	ØXXX	± .015
XXX	± .015	ØXXXX	± .010

APPROVALS

DATE	DATE
SS	12/30/05

CHECKED _____
 DRAWN _____
 APPROVED _____

TITLE	SIZE	PART NO.	REV.
MINI DIN JACK, RIGHT ANGLE, FULL SHIELD GREEN, PANTONE COLOR 3395C	X	MDJ-00X-FS-GRN	-

REF: _____ SCALE: NTS SHEET 1 OF 1