
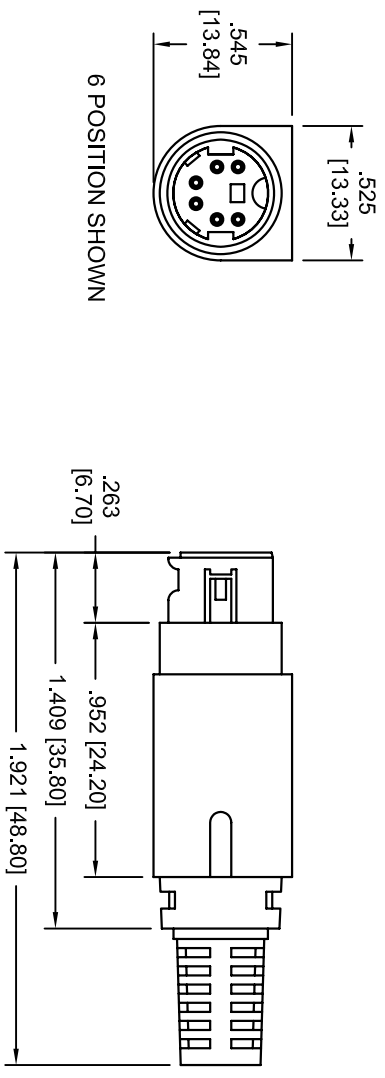


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/3/07	

APPROVED: _____
 DATE: _____ TITLE: _____

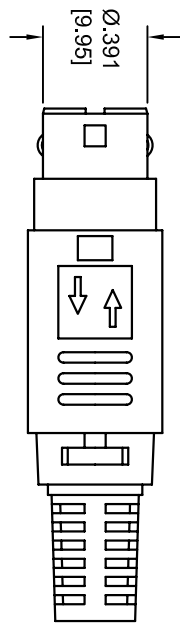

6 POSITION SHOWN

MATING FACE CONFIGURATIONS						
MDP-003-LT	MDP-004-LT	MDP-005-LT	MDP-006-LT	MDP-007-LT	MDP-008-LT	MDP-009-LT

SPECIFICATIONS:
Material: Insulator: PBT, glass filled, rated UL 94V-0
 Insulator color: Black
Contacts: Brass
Shield: Copper Alloy, Tin plated
Plating: Nickel on mating area, Tin over Copper underplate on solder area
Electrical:
 Operating voltage: 100 VAC/12 VDC max.
 Current rating: 2 Amp max.
 Contact resistance: 20 mohms max. initial
 Insulation resistance: 500 Mohms min.
 Dielectric withstanding voltage: 250 VAC for 1 minute
 Temperature Rating: Operating temperature: -25°C to +70°C
Environmental: Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLEES ±.10 ±.015
 .XX ±.020 ØXXX ±.010
 .XXX ±.015 ØXXX ±.010
 APPROVALS DATE

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710
 TITLE: MINI DIN POWER PLUG, LOCK TYPE
 3P THRU 9P

DRAWN	SS	5/3/07	SIZE	PART NO.	MDP-XX-LT	REV.
CHECKED			X			
APPROVED			REF:	SCALE:	NTS	SHEET 1 OF 1

6 5 4 3 2 1