
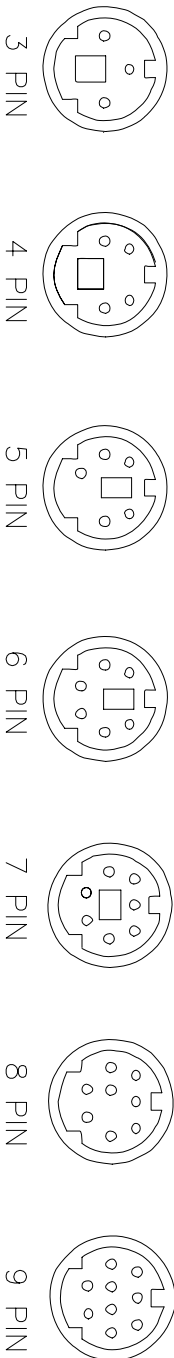


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/28/04	

APPROVED: _____
 DATE: _____ TITLE: _____

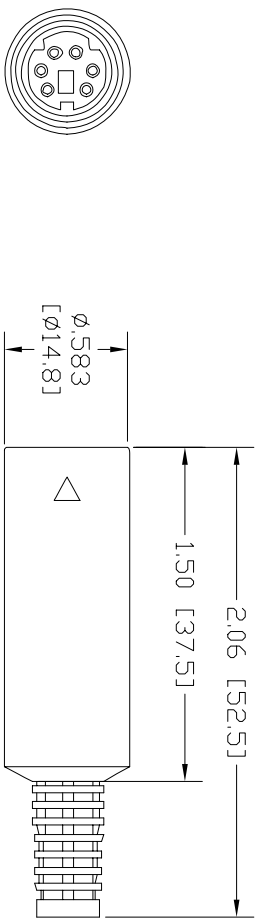

SPECIFICATIONS:

Material:
 Insulator: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Shield: Copper Alloy, Tin plated
 Plating:
 Contacts: Nickel on mating area, Tin over Copper underplate on solder contacts
Electrical:
 Operating voltage: 250 VAC max
 Current rating: 1 Amp max
 Contact resistance: 20 mohms max
 Insulation resistance: 500 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
 Operating temperature: -25°C to +70°C

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES EXCEPT AS NOTED	
.X	± .10	ØXX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010
APPROVALS		DATE	
DRAWN	SS	9/28/04	
CHECKED			
APPROVED			
TITLE		SIZE	PART NO.
MINI DIN FEMALE PLUG, BOOT WITH STRAIN RELIEF, 3 TO 9 POSITION		X	MDS-XXX
REF:		SCALE:	SHEET 1 OF 1

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710