
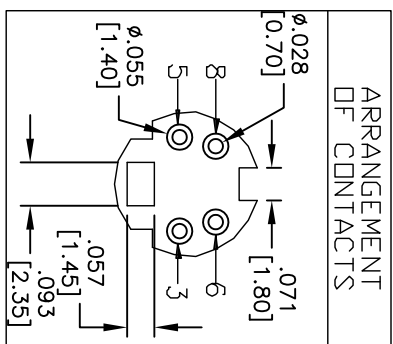
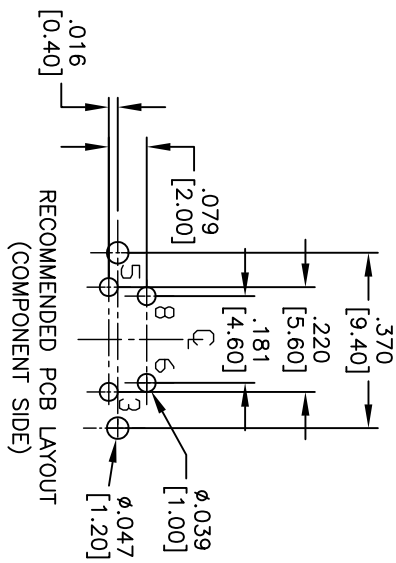
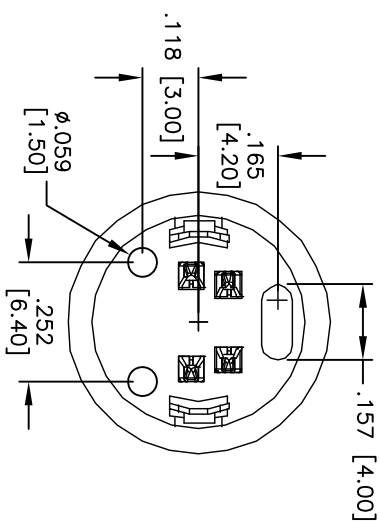
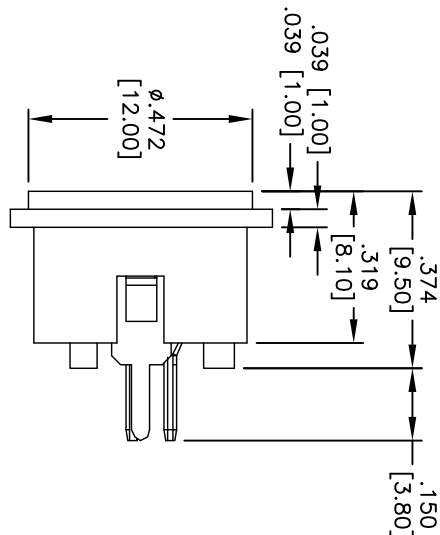


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/28/04	
A		REDRAWN	5/03/11	

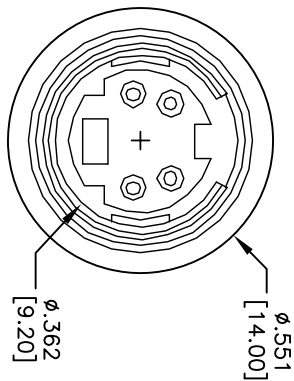

SPECIFICATIONS:
 Material: PBT, glass reinforced
 Housing: PBT, glass reinforced
 Contact terminal: Phosphor Bronze, silver plated
 Ground terminal: Brass, Tin plated

Operating voltage: 100V AC 1A MAX or 12V DC 2A MAX
 Contact resistance: 30 mohms max.
 Insulation resistance: 100 Mohms min @ 500V DC
 Dielectric withstanding voltage: 250 VAC for 1 minute
 Environmental:
 Lead free, RoHS compliant.

UNLESS OTHERWISE SPECIFIED	
ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
.X	± .10
.XX	± .020
.XXX	± .015
.XXX	± .010
ØXX	± .10
ØXXX	± .015
ØXXX	± .010
APPROVALS	DATE
SS	6/28/04

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MINI DIN JACK, VERTICAL TYPE	
SIZE: X	PART NO.: MDV-004
CHECKED:	SCALE: NTS
APPROVED:	SHEET 1 OF 1

