



Rev	AWO #	Description	Date	Appr
-	10902	RELEASED	11/25/10	

APPROVED: _____ TITLE: _____
 DATE: _____



SECTION A-A

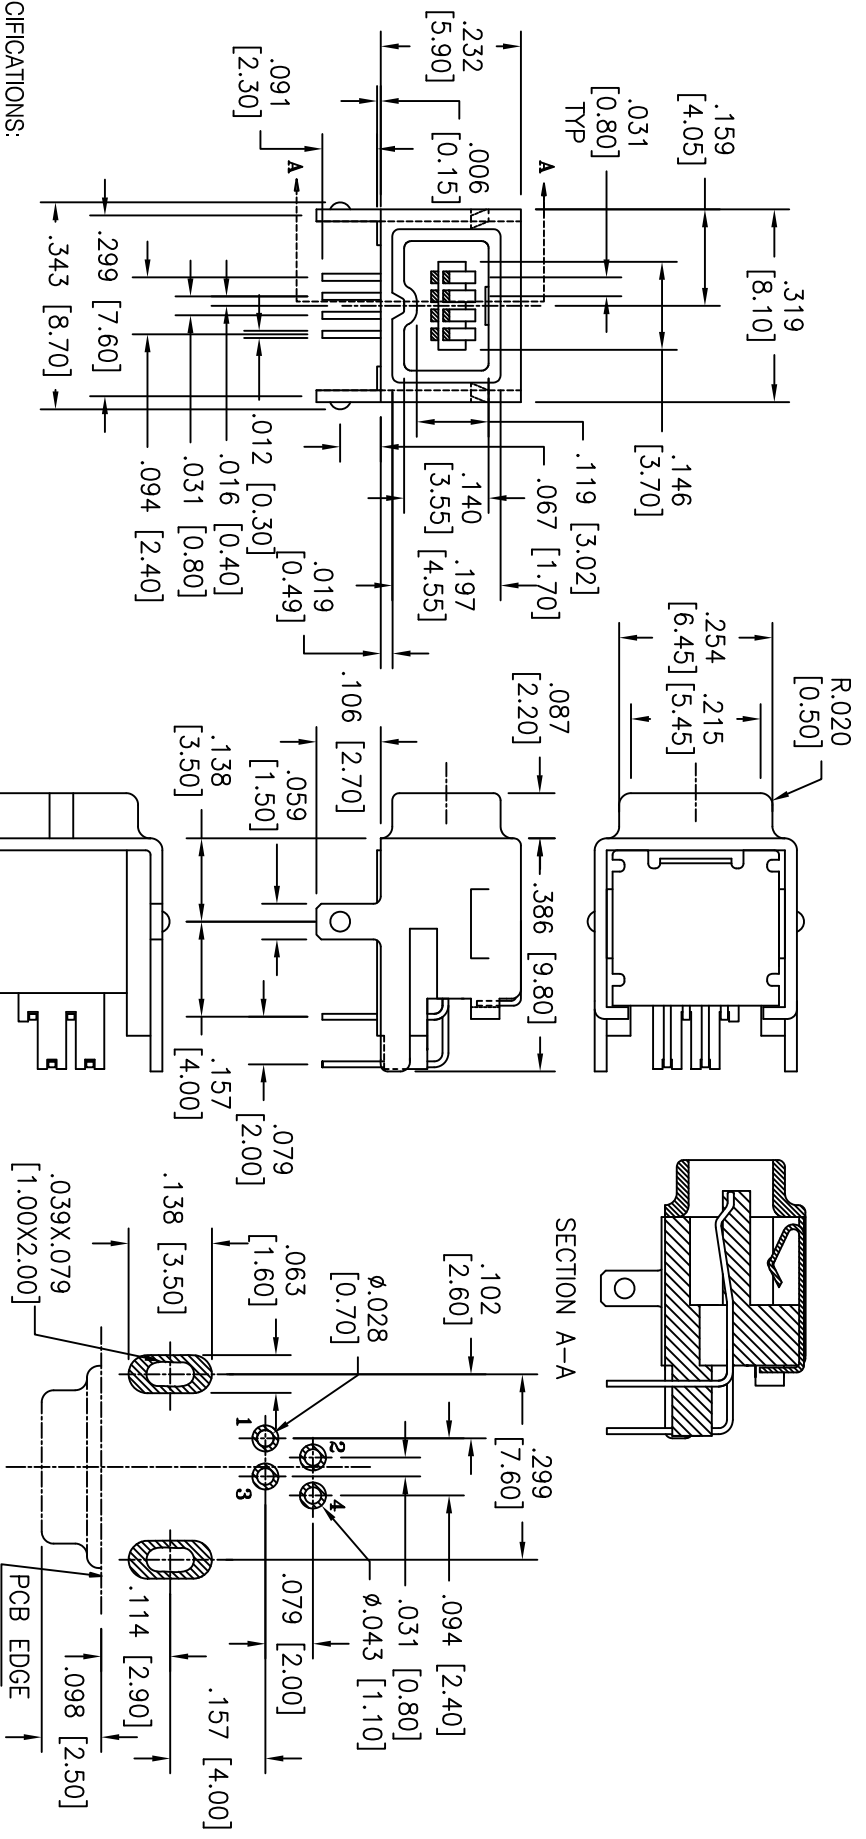

RECOMMENDED PCB LAYOUT
(COMPONENT SIDE)

SPECIFICATIONS:

Material: Insulator: PA9T, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Shell: Steel, Nickel plated

Plating:

Contacts: Gold Flash over Nickel underplate

Electrical:

Operating voltage: 30 VAC max

Current rating: 1.5 Amp max

Contact resistance: 50 mohms max.

Insulation resistance: 100 Mohms min @ 500 VDC

Dielectric withstanding voltage: 250 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +105°C



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MINI FIREWIRE 1394, 4 PIN, R/A, PCB MOUNT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED		INCHES		HOLES	
X	± .10	ØX	± .10	X	± .015
.XX	± .020	ØXX	± .015	.XXX	± .010
.XXX	± .015	ØXXX	± .010		
APPROVALS		DATE			
DRAWN	DY	11/26/10			
CHECKED					
APPROVED					
SIZE	PART NO.	SCALE	NTS	SHEET	1 OF 1
X	MFW-C-S-RA-S2				
REF:	S00140T				