

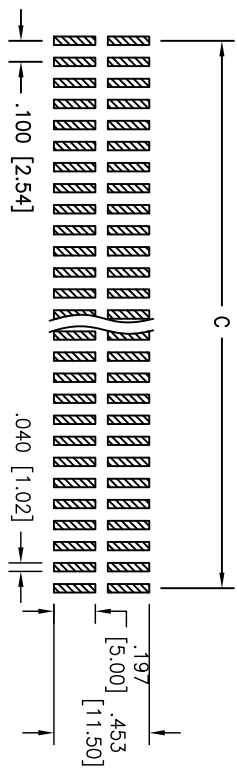
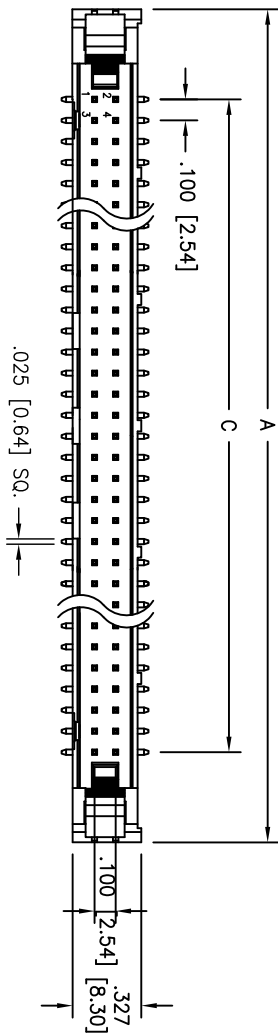


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/19/10	
A		REVISED DIM.	11/16/10	



RECOMMENDED PCB LAYOUT

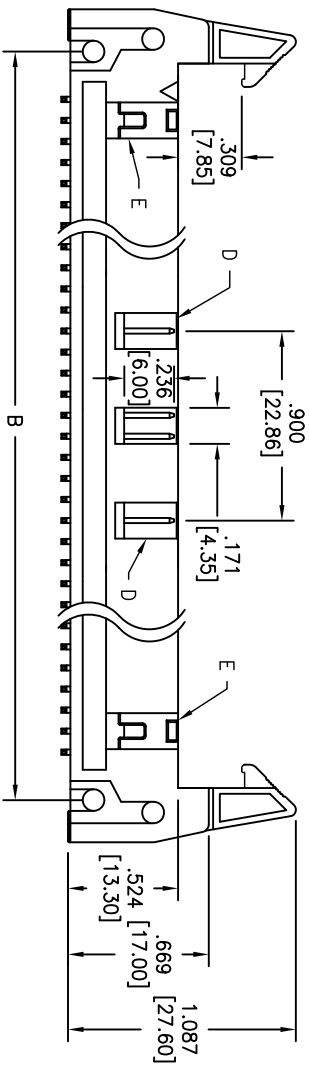

SPECIFICATION:

Material:

Insulator: PA6T, glass reinforced, rated UL-94V-0
 Insulator Color: Black

Contact Plating:

Contacts: Brass
 Gold Flash over Nickel underplate overall.

Electrical:

Current rating: 3 Amps max.
 Contact resistance: 20 mohms max
 Insulation resistance: 1000 Mohms min
 Dielectric withstanding voltage: 1000 VAC / minute
Temperature Rating:
 Operating temperature: -40°C TO +105°C
 Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 260°C for 5 sec.

Positions: 6, 8, 10, 12, 14, 16, 18, 20, 24, 26, 30, 34, 40, 50, 60, 64
 A = .100 [2.54] X No. of Positions / 2 + .756 [19.20]
 B = .100 [2.54] X No. of Positions / 2 + .354 [9.00]
 C = .100 [2.54] X No. of Positions / 2 - .100 [2.54]
 No side slot "D" and "E" from 6 to 16 Pin
 No side slot "D" from 18 to 58 Pin

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES Holes
 .X ± .10 ØXX ± .10
 .XX ± .020 ØXX ± .015
 .XXX ± .015 ØXXX ± .010

APPROVALS	DATE	TITLE
DRAWN	DY	1/19/10
CHECKED		
APPROVED		

SIZE	PART NO.	REV.
X	MHR-XX-VUAL-SMT-MP	A

REF.	SCALE:	NTS	SHEET	1 OF 1
	S00019C			

