APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/04/09	
A		REVISED P/N	9/14/09	

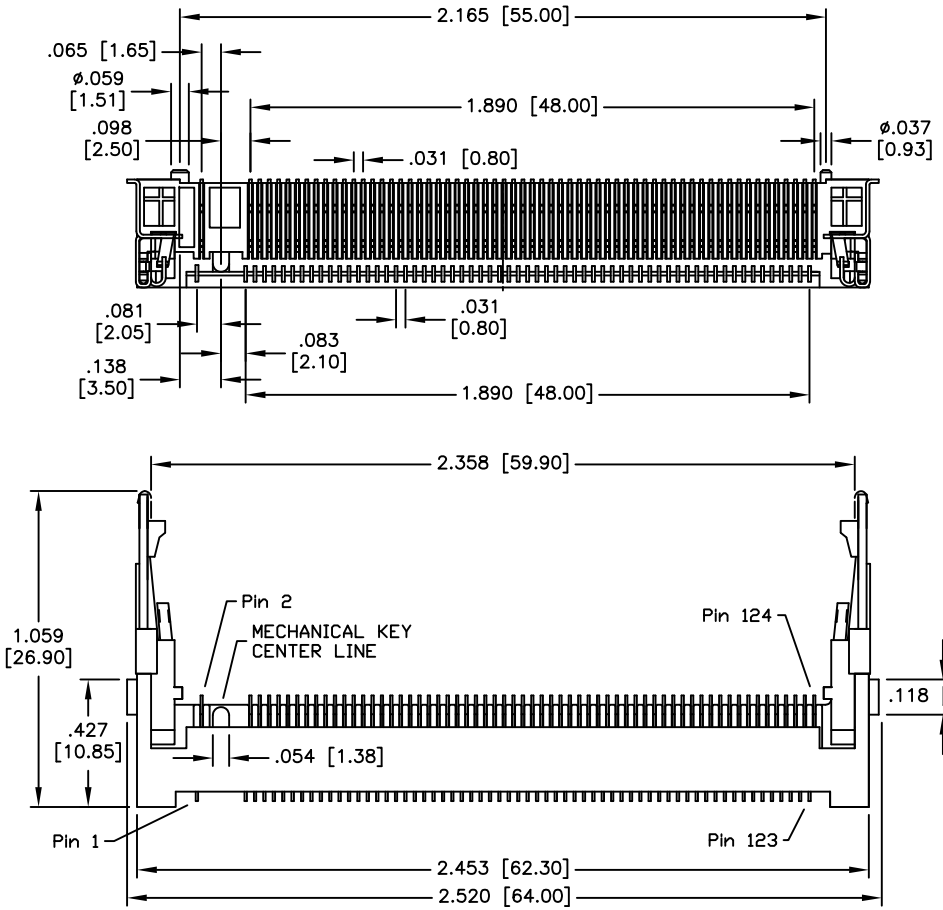

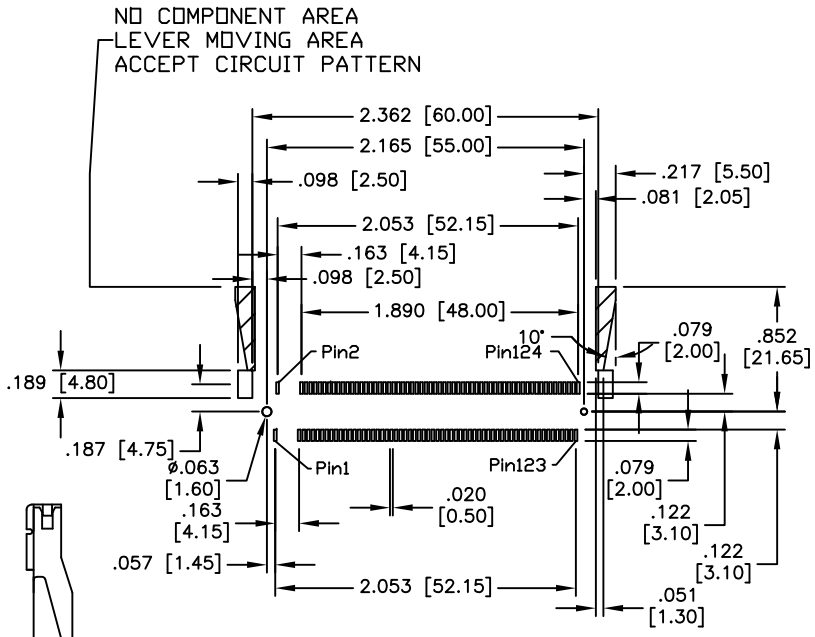

RECOMMENDED PCB LAYOUT

ADAM P/N	A DIM.
MPCI-A-124-SG-5.2	.205 [5.20]
MPCI-A-124-SG-5.6	.220 [5.60]
MPCI-A-124-SG-6.0	.236 [6.00]
MPCI-A-124-SG-6.8	.268 [6.80]
MPCI-A-124-SG-9.2	.362 [9.20]

SPECIFICATIONS:
Material:
Insulator: Hi-temp thermoplastic, rated UL94V-0
Contacts: Copper Alloy
Solder Tab & Latch: Copper Alloy
Plating:
Contact: Gold over Nickel underplate
Environmental:
Lead free, RoHS compliant.
Recommended soldering temp: 260°C for 5 sec.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± 0.25	Ø.XX	±0.13
.XX	± 0.15		
.XXX	± 0.05		

APPROVALS		DATE
DRAWN	DY	8/04/09
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
MINI PCI SOCKET 0.8 PITCH, 124 POSITION

SIZE	PART NO.	REV.
X	MPCI-A-124-SG-X.X	A

REF:	SCALE:	SHEET
S00079T	NTS	1 OF 1