

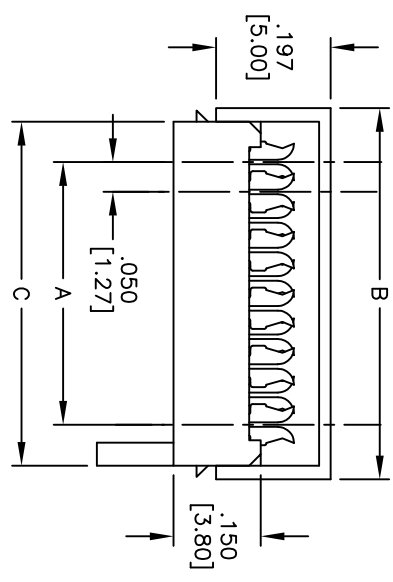


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/06/09	
A		CHANGED COLOR	11/17/09	

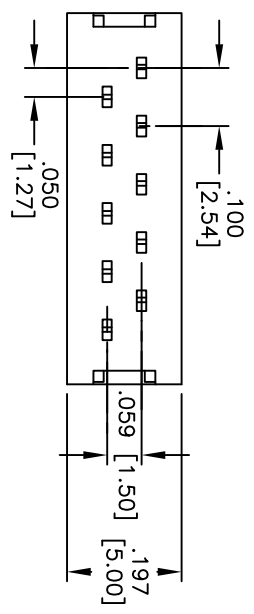

Positions: 2 thru 10 per row
 A = .050 [1.27] x No. of Spaces
 B = .050 [1.27] x No. of Spaces + .188 [4.77]
 C = .050 [1.27] x No. of Spaces + .133 [3.37]

SPECIFICATIONS:
 Material: Insulator: PBT, rated UL 94V-0
 Insulator color: Red
 Contacts: Phosphor Bronze
 Plating: Tin over Copper underplate overall
 Electrical: Voltage rating: 30V AC/DC
 Current rating: 1A AC/DC
 Contact resistance: 20 mohms max.
 Insulation resistance: 1,000 Mohms min.
 Dielectric withstanding: 500V AC for 1 minute
 Temperature Rating: Operating temperature: -40°C to +105°C
 Environmental: Lead free, RoHS compliant
 Recommended soldering temp: 235°C for 5 seconds



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLEES [MM]
 .X ± .10 ØXX ± .10
 .XX ± .020 ØXXX ± .015
 .XXX ± .015 ØXXXX ± .010
 APPROVALS DATE

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710
 TITLE: ON WIRE TYPE, TIN PLATED
 .100 [2.54] IDC CONNECTOR MALE,
 ON WIRE TYPE, TIN PLATED

DRAWN	DY	11/06/09
CHECKED		
APPROVED		

SIZE	PART NO.	REV.
X	MPH-XX-F-1	A
REF:	S00066T	SCALE: NTS
SHEET	1	OF 1

6 5 4 3 2 1