Rev	AWO #	Description	Date	Appr
-		RELEASED	5/03/10	

APPROVED: _____

DATE: _____ TITLE: _____

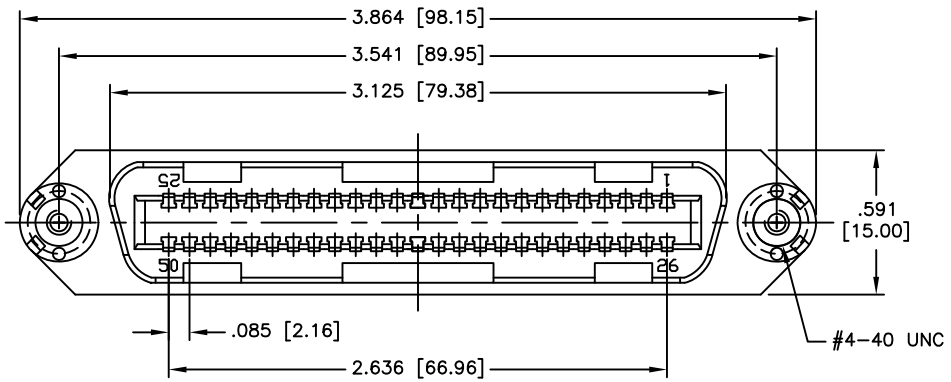

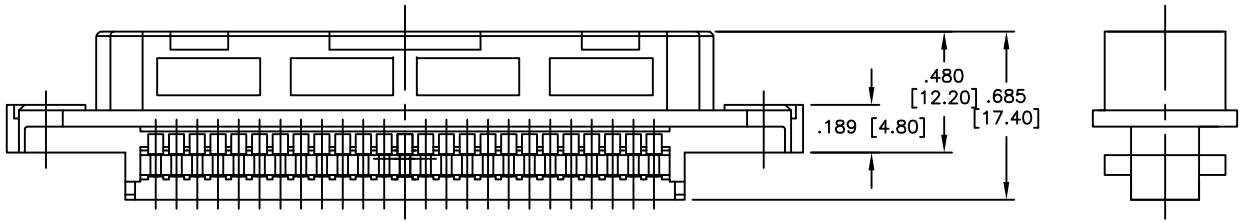

SPECIFICATIONS:
Material:
Insulator: PBT, glass reinforced, rated UL 94V–0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Gold flash over Nickel underplate on mating area,
Tin over Copper underplate on tails
Electrical:
Current rating: 1 Amp max
Contact resistance: 25 mohms max
Insulation resistance: 10,000 Mohms min
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
Operating temperature: –55°C to +125°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	5/03/10
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: RIBBON CABLE IDC TYPE CONNECTOR
64PIN FEMALE

SIZE	PART NO.	REV.
X	MR64-SE-34	-

REF: S00150T	SCALE: NTS	SHEET 1 OF 1