
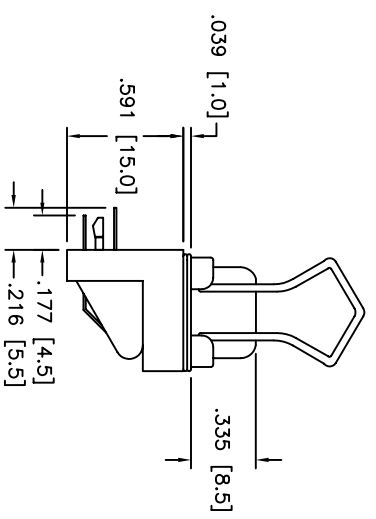
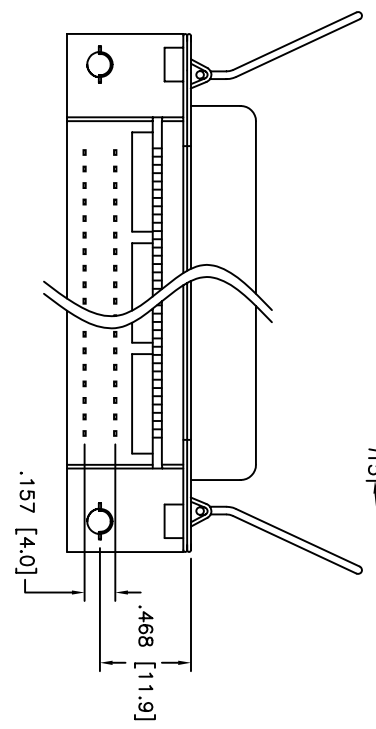
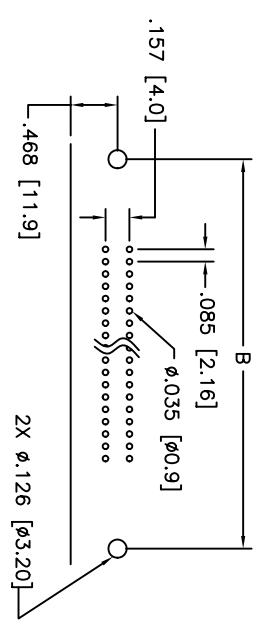


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/8/04	

APPROVED: _____
 DATE: _____ TITLE: _____

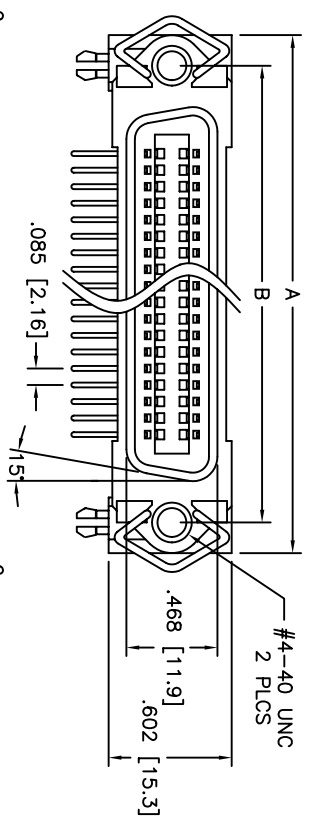

NOTE: LATCHES ARE NOT INSTALLED

PART NO. & POSITIONS	Dimensions	
	A	B
MR14-SD-14-F	1.750 (44.45)	1.417 (35.99)
MR24-SD-14-F	2.175 (55.25)	1.842 (46.79)
MR36-SD-14-F	2.685 (68.20)	2.352 (59.74)
MR50-SD-14-F	3.280 (83.31)	2.947 (74.85)

Unit: Inch / mm

SPECIFICATIONS:

- Material: Insulator: PBT, glass reinforced, rated UL 94V-0
- Insulator color: Blue
- Contacts: Phosphor Bronze
- Shell: Steel, Nickel plated
- Plating: Gold Flash over Nickel underplate on contact area, Tin over Copper underplate on tails
- Electrical:
 - Operating voltage: 250 VAC max
 - Current rating: 1 Amp max
 - Contact resistance: 35 mohms max
 - Insulation resistance: 1000 Mohms min
 - Dielectric withstanding voltage: 1000 VAC for 1 minute
 - Temperature Rating: Operating temperature: -55°C to +105°C

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

MINIATURE RIBBON CONNECTORS, R/A
 PCB MOUNT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
.X	±.10
.XX	±.020
.XXX	±.015
.XXX	±.010
ØXX	±.015
ØXXX	±.010
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	MRXX-SD-14-F	-
SCALE:	NTS	SHEET 1 OF 1