

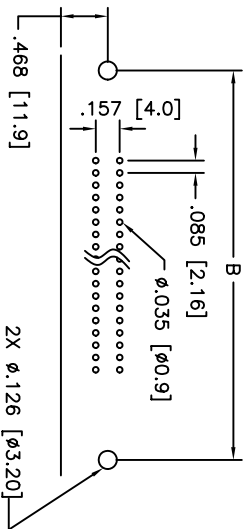
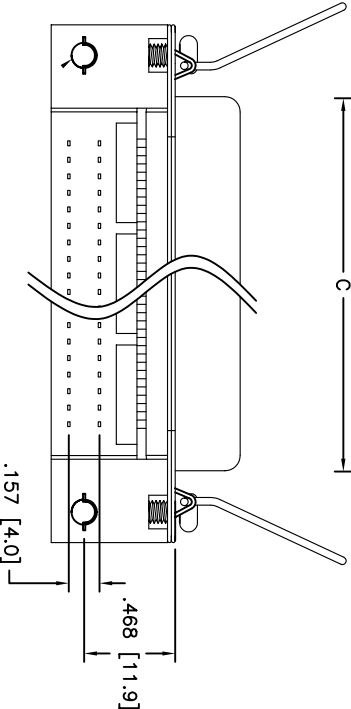


Rev	AWO #	Description	Date	Appr
-		RELEASED	02/21/05	

APPROVED: _____
 DATE: _____ TITLE: _____

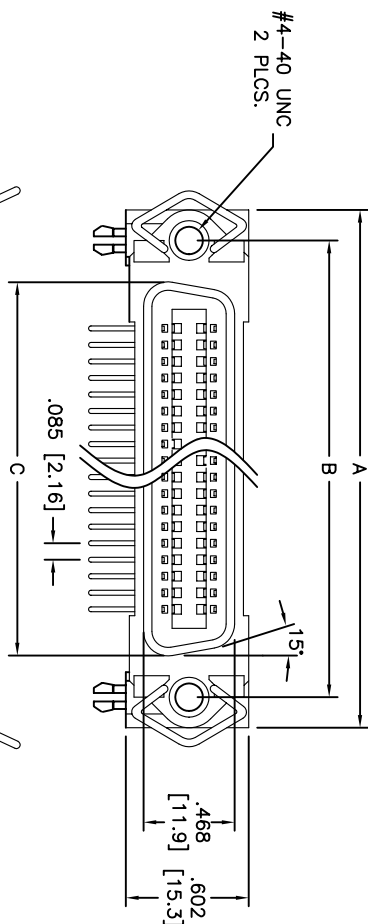

RECOMMENDED PCB LAYOUT

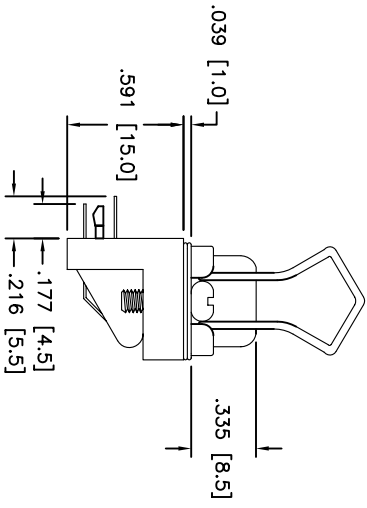

POSITION	C	B	C
14	1.728 [43.90]	1.417 [36.00]	.992 [25.20]
24	2.154 [54.70]	1.843 [46.80]	1.417 [36.00]
36	2.665 [67.70]	2.350 [59.70]	1.890 [48.00]
50	3.260 [82.80]	2.949 [74.90]	2.524 [64.10]

SPECIFICATIONS:

Material: Insulator: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Blue
 Contacts: Phosphor Bronze
 Shell: Steel, Nickel plated
 Plating: Gold Flash over Nickel underplate on mating area, Tin over Copper underplate on solder tails.

Electrical:

Operating voltage: 250 VAC max
 Current rating: 1 Amp max
 Contact resistance: 35 mohms max
 Insulation resistance: 100 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC for 1 minute
 Temperature Rating: Operating temperature: -55°C to +105°C

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE IN INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES Holes
 .X ±.10
 .XX ±.020
 .XXX ±.015
 .XXX ±.010

APPROVALS	DATE
DRAWN SS	02/21/05
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **MINIATURE RIBBON, RIGHT ANGLE, PCB FEMALE, REVERSE FACE**

SIZE	PART NO.	REV.
X	MRXX-SD-14-RF	-

SCALE: NTS SHEET 1 OF 1