
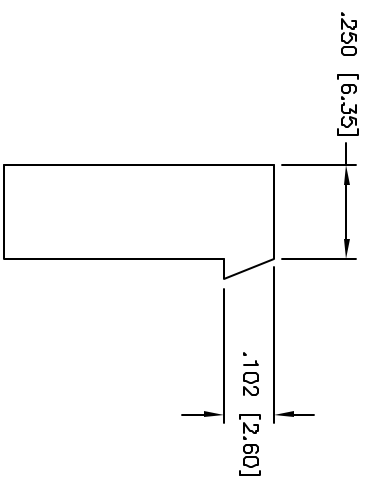
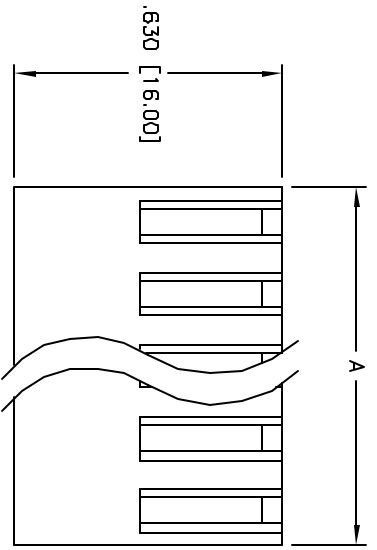


APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/12/05	

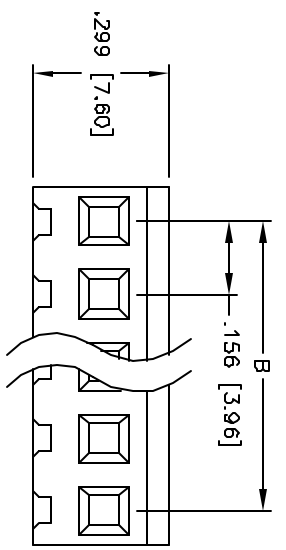

Positions: 2 thru 20  
 A = .156 [3.96] x No. of Positions + .016 [0.40]  
 B = .156 [3.96] x No. of Spaces

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE NICHES [MM]  
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLDS
.10	∅X ±.10
.020	∅XXX ±.010
.015	∅XXX ±.010

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE  
**.156 [3.96] WIRE HOUSING**

APPROVALS	DATE	SIZE	PART NO.	SCALE	SHEET	OF
DRAWN	SS	4/12/05	MTB-XX	NIB	1	1
CHECKED						
APPROVED						

**SPECIFICATIONS:**  
 Material:  
 Insulator: Nylon 66, rated UL 94V-2  
 Insulator color: White  
 Electrical:  
 Operating voltage: 250 VAC max  
 Current rating: 5 Amps max  
 Insulation resistance: 1,000 Mohms min  
 Dielectric withstanding voltage: 1,500 VAC for 1 minute  
 Temperature Rating:  
 Operating temperature: -25°C to +85°C  
 Environmental:  
 Lead free, RoHS compliant



6 5 4 3 2 1

6 5 4 3 2 1