
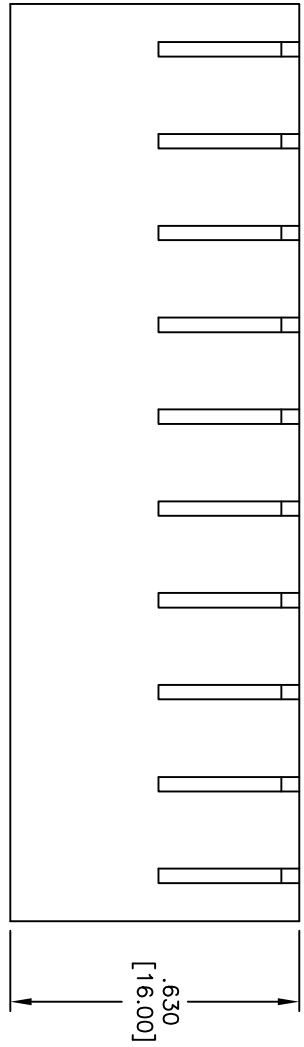


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/19/11	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

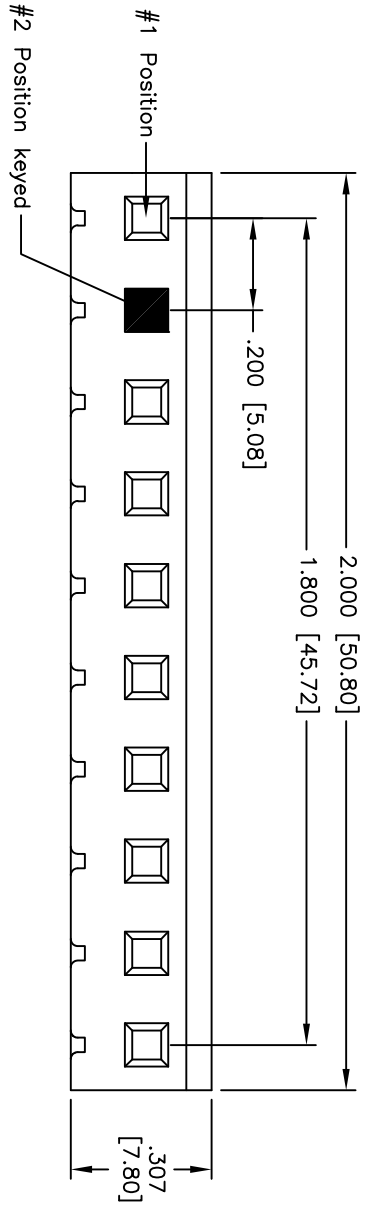

**SPECIFICATIONS:**

Material: Insulator: Nylon 66, glass reinforced, UL94V-2  
 Insulator color: Natural  
 Electrical: Voltage rating: 250V AC/DC  
 Current rating: 5A AC/DC  
 Insulation resistance: 1,000 Mohms min  
 Dielectric withstanding voltage: 1,500 VAC for 1 minute  
 Temperature Rating: Operating temperature: -25°C to +85°C  
 Environmental: Lead free, RoHS compliant

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN DY	1/19/11
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **.200 [5.08] PITCH CRIMP CONTACT HOUSING**

SIZE: X PART NO.: MTF-B-10-K02  
 REF: S00015T SCALE: NTS SHEET 1 OF 1

6 5 4 3 2 1