
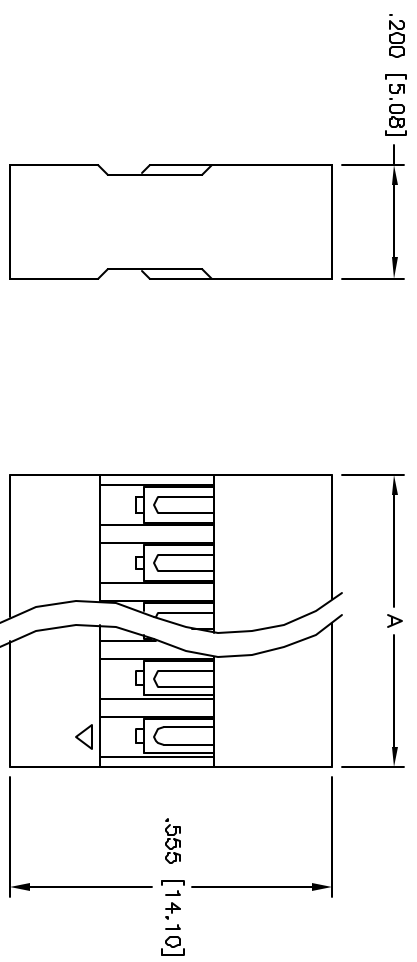


| Rev | AWO # | Description | Date | Appr |
|-----|-------|-------------|--------|------|
| - | | RELEASED | 4/7/05 | |

APPROVED: _____
 DATE: _____ TITLE: _____

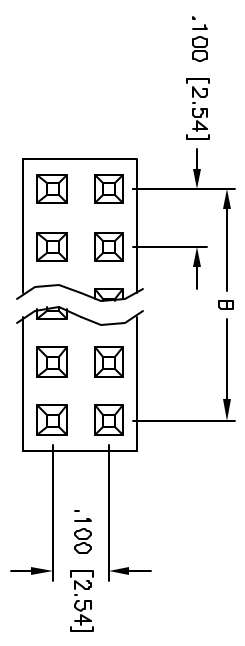

Positions: 4 thru 80
 A = .100 [2.54] x No. of Positions
 B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

| INCHES | HILES |
|--------|-------|
| .10 | ±.10 |
| .020 | ±.019 |
| .015 | ±.010 |

SPECIFICATIONS:
 Material: _____
 Insulator: PBT, glass reinforced, UL94V-2
 Insulator color: Black
 Electrical:
 Operating voltage: 250 VAC max
 Current rating: 3 Amps max
 Insulation resistance: 5,000 Mohms min
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -65°C to +105°C
 Environmental:
 Lead free, RoHS compliant



| | | | | | |
|----------|--|----|------|--|--------|
| DRAWN | | SS | DATE | | 4/7/05 |
| CHECKED | | | DATE | | |
| APPROVED | | | DATE | | |

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

CRIMP CONTACT HOUSING

SIZE PART NO. MTF-XX
 SCALE: NTS
 SHEET 1 OF 1