
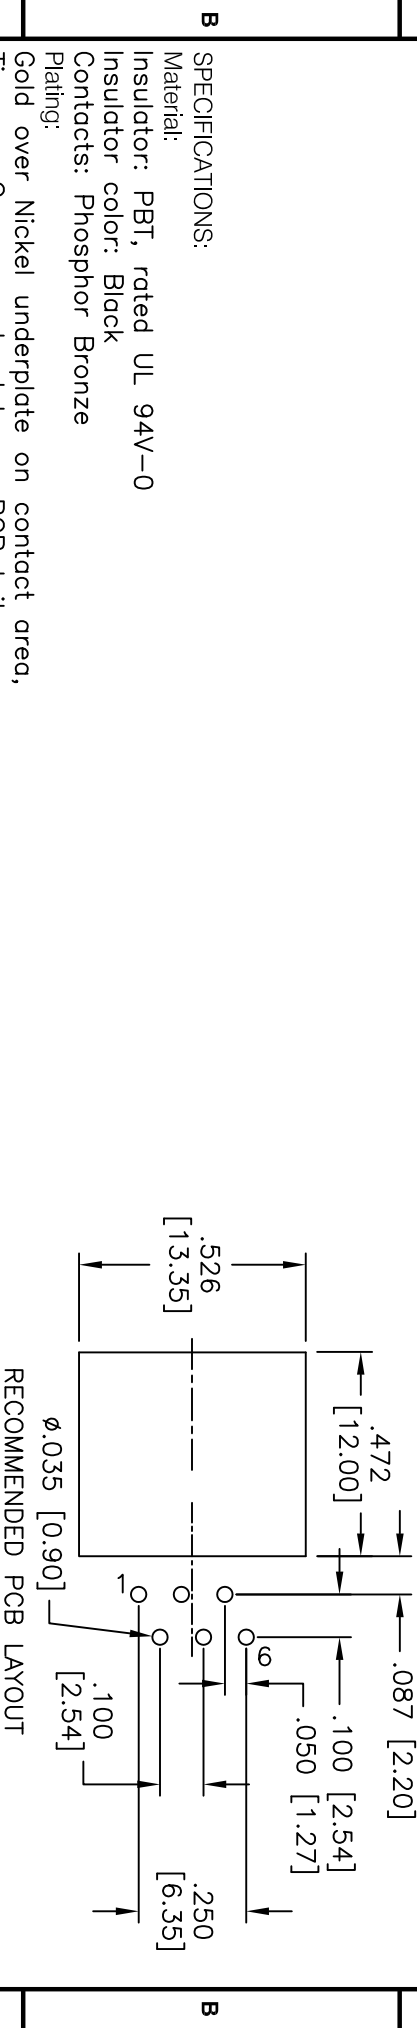


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/04/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

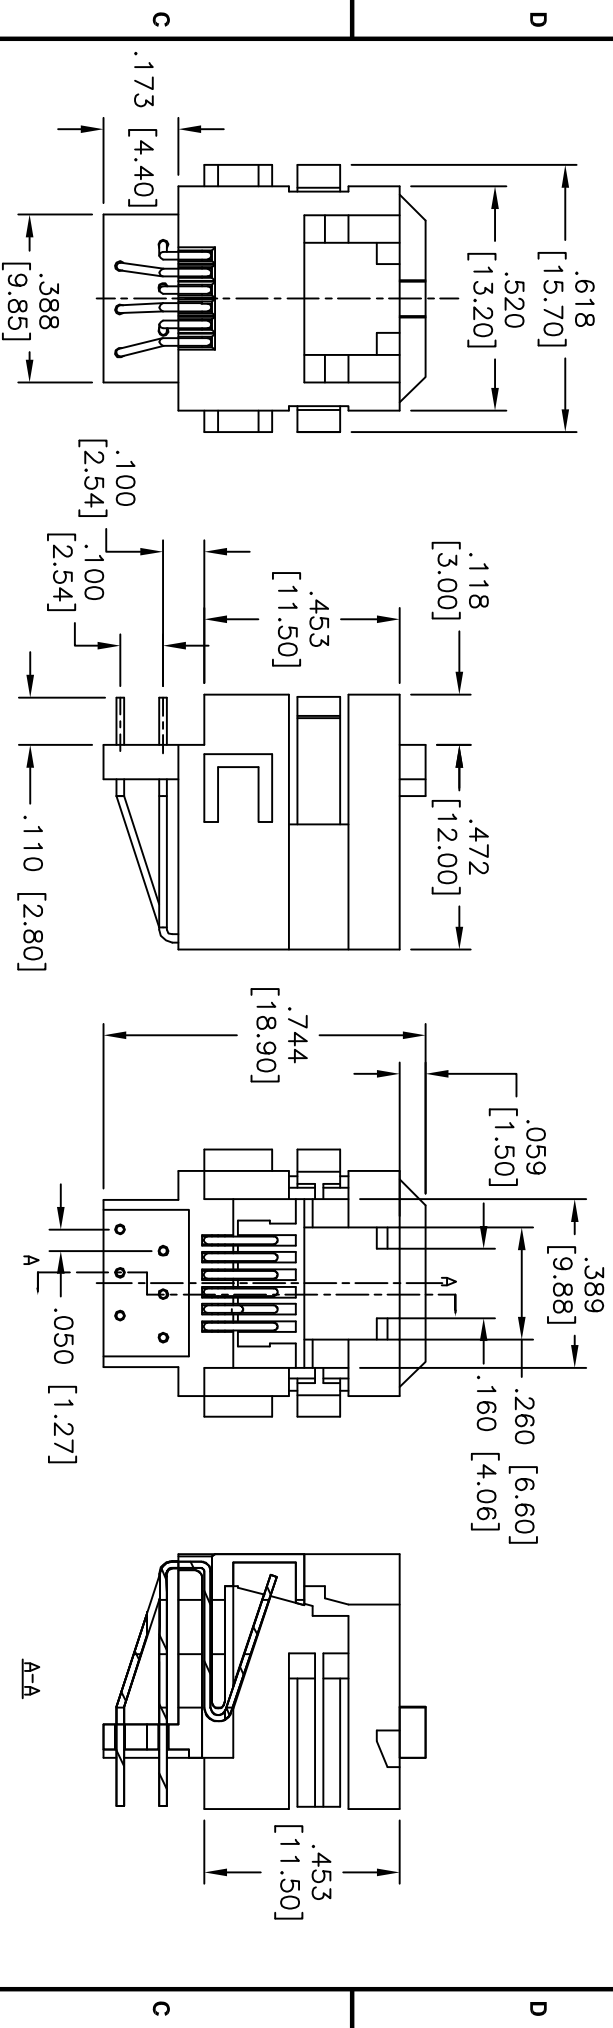

**SPECIFICATIONS:**

**Material:**  
 Insulator: PBT, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Phosphor Bronze  
 Plating:  
 Gold over Nickel underplate on contact area,  
 Tin over Copper underplate on PCB tails.  
 (See chart for thickness)

X	PLATING
0	15 $\mu$ in Gold
1	30 $\mu$ in Gold
2	50 $\mu$ in Gold

**Electrical:**  
 Operating voltage: 125 VAC max  
 Current rating: 1.5 Amps max  
 Contact resistance: 35 mohms max  
 Insulation resistance: 1000 Mohms min @ 500 VDC  
 Dielectric withstanding voltage: 1000 VAC for 1 minute  
 Temperature Rating:  
 Operating temperature: -40°C to +85°C  
 Lead free, RoHS compliant.  
 Recommended soldering temp: 235°C for 5 sec.



**ADAM TECH**

909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **BOTTOM ENTRY 6P6C MODULAR JACK CENTER LATCH**

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		INCHES		Holes		DATE	
.X	$\pm$ .10	$\phi$ X	$\pm$ .10				
.XX	$\pm$ .020	$\phi$ XXX	$\pm$ .015				
.XXX	$\pm$ .015	$\phi$ XXX	$\pm$ .010				
DRAWN		DY		6/04/10		TITLE	
CHECKED						PART NO.	
APPROVED						MTJ-66KA-A-01	
REF: S0005C		SCALE: NTS		SHEET 1 OF 1		REV.	