

6

5

4

3


2

1

Rev	AWO #	Description	Date	Appr
		SEE SHT 1 OF 2 FOR REVISION		

APPROVED: _____

DATE: _____ TITLE: _____

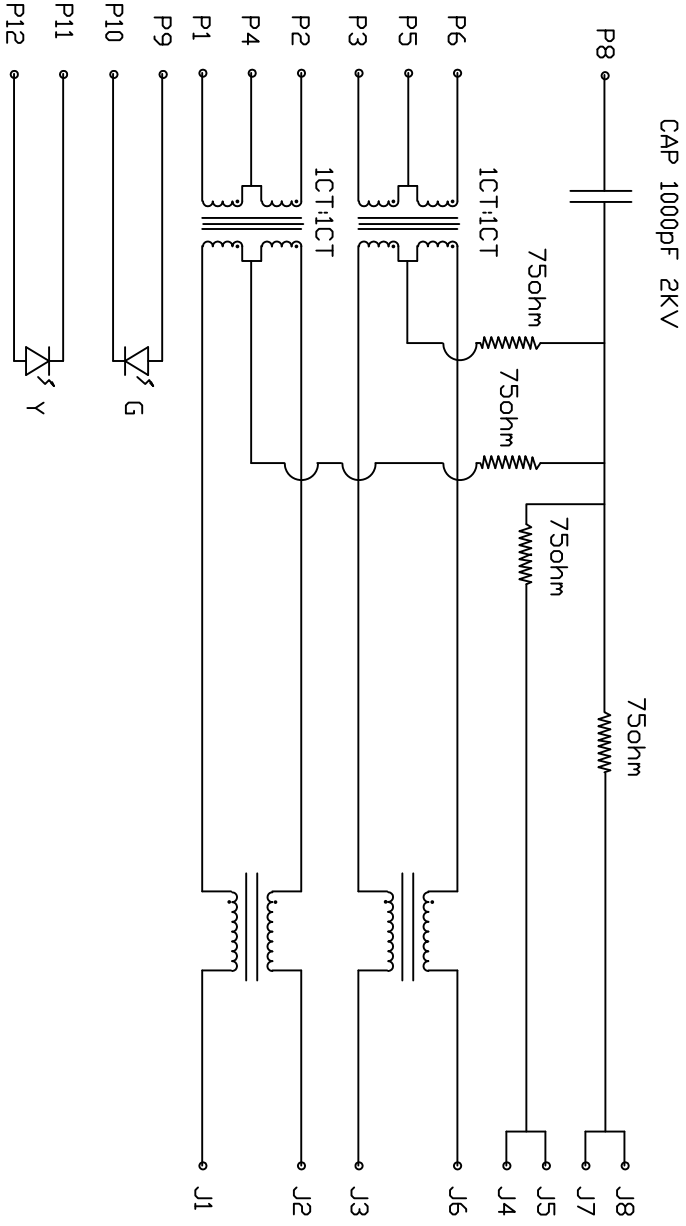

ELECTRICAL SPECIFICATIONS:

- Turns Ratio: (P1 ~ P2) : (J1 ~ J2) 1:1 ±3%
(P3 ~ P6) : (J3 ~ J6) 1:1 ±3%
- Inductance: (P1 ~ P2) 350uH min. @ 0.1V, 100KHZ, 8mA DC Bias
(P3 ~ P6) 350uH min. @ 0.1V, 100KHZ, 8mA DC Bias
- Leakage Inductance: P1 ~ P2 (with J1 and J2 Short): 0.3uH Max. @ 1 MHz
P3 ~ P6 (with J3 and J6 Short): 0.3uH Max. @ 1 MHz
- Interwinding Capacitance: (P1 ~ P2) : (J1 ~ J2): 35pf max @ 1MHz
(P3 ~ P6) : (J3 ~ J6): 1.2 Ohms Max.
- DC Resistance: (J1 ~ J2):(J3 ~ J6) :1.2 Ohms Max.
- Return Loss: 1MHZ to 30MHZ: -18dB min / 30MHZ to 80MHZ: -12dB min
- Dielectric Withstanding: (P1~P2) : (J1~J2) :1500VAC
(P3~P6) : (J3~J6) :1500VAC
- Insertion Loss: RS=RL=100OHM : 100KHZ TO 80MHZ : -1.1dB Min.
- Cross Talk: 1MHZ to 100MHZ: 35dB Typ.
30MHZ to 100MHZ: 30dB Typ.

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]

TOLERANCES: EXCEPT AS NOTED

INCHES	HOLE	±.10
.X	ØXX	±.015
.XX	ØXXX	±.010
.XXX	ØXXXX	

APPROVALS

DRAWN	AY	9/30/10
CHECKED	VW	9/30/10
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

MODULAR JACK GANGED, 1 PORT, 8P8C
W/LED1 GREEN, LED2 YELLOW

TITLE	SIZE	PART NO.	REV.
MODULAR JACK GANGED, 1 PORT, 8P8C	X	MTJ-88TX1-FSD-PG-D1LH-M121	A
W/LED1 GREEN, LED2 YELLOW			
REF:	SCALE:	NTS	SHEET 2 OF 2

6

5

4

3

2

1