

6

5

4

3



2

1

Rev	AWO #	Description	Date	Appr
		SEE SHT 1 OF 2 FOR REVISION		

APPROVED: _____

DATE: _____ TITLE: _____

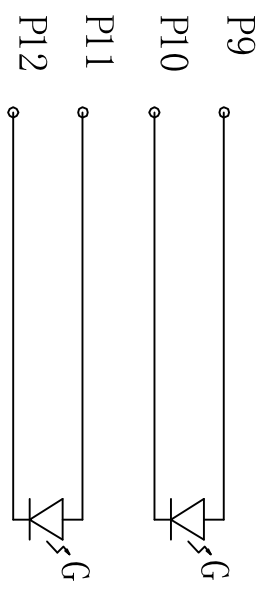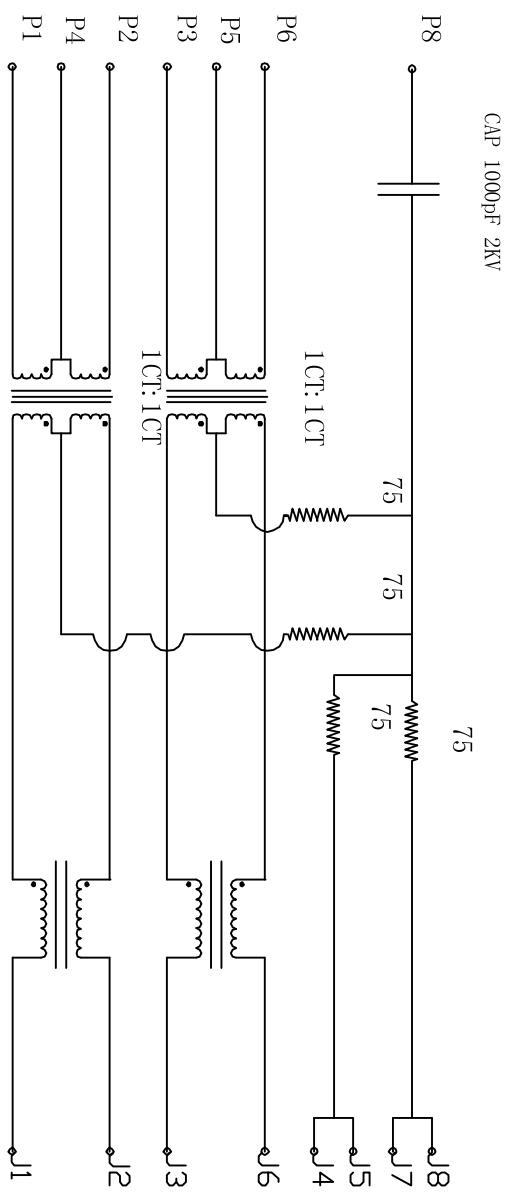

ELECTRICAL SPECIFICATIONS:

- Turns Ratio: (P1 ~ P2) : (J1 ~ J2) 1:1 ±3%
(P3 ~ P6) : (J3 ~ J6) 1:1 ±3%
- Inductance: (P1 ~ P2) 350µH min. @ 0.1V, 100KHZ, 8mA DC Bias
(P3 ~ P6) 350µH min. @ 0.1V, 100KHZ, 8mA DC Bias
- Leakage Inductance: P1 ~ P2 (with J1 and J2 Short): 0.35µH Max. @ 1 MHz
P3 ~ P6 (with J3 and J6 Short): 0.35µH Max. @ 1 MHz
- Interwinding Capacitance: (P1 ~ P2) : (J1 ~ J2): 35pF max. @ 1MHZ
(P3 ~ P6) : (J3 ~ J6) : 1.2 Ohms Max.
- DC Resistance: (J1 ~ J2):(J3 ~ J6) :1.2 Ohms Max.
- Return Loss: 1MHZ to 30MHZ: -18dB min / 30MHZ to 80MHZ: -12dB min
- Dielectric Withstanding: (P1~P2) : (J1~J2) :1500VAC
(P3~P6) : (J3~J6) :1500VAC
- Insertion Loss: RS=RL=1000HM : 100KHZ TO 80MHZ : -1.1dB Min.
- Cross Talk: 1MHZ to 100MHZ: 35dB Typ.
- Common to Common mode Attenuation 30MHZ to 100MHZ: 30dB Typ.

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

.X	± .10	Ø.X	HOLES	± .10
.XX	± .020	Ø.XXX		± .015
.XXX	± .015	Ø.XXX		± .010

APPROVALS

DRAWN	DY	DATE
CHECKED		
APPROVED		

ADAM TECH
909 Ratway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MODULAR JACK GANGED, 1 PORT, 8P8C
W/ LED1 GREEN, LED 2 GREEN

SIZE: PART NO. MTJ-88TX1-FSD-PG-LD-M4
X REF: SCALE: NTS SHEET 2 OF 2

6

5

4

3

2

1