

6

5

4

3

2


1

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
		SEE SHT 1 OF 2 FOR REVISION		

PCB TOP VIEW

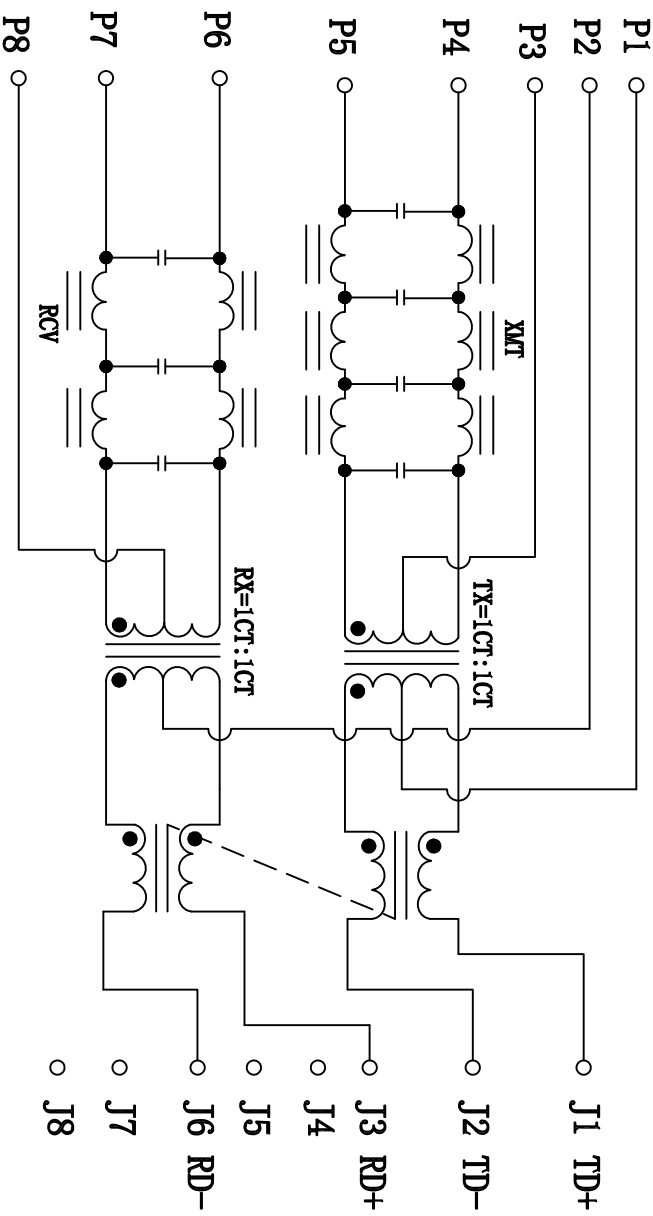

RJ45 FRONT VIEW

- SPECIFICATIONS:**
1. Isolation: 1500Vrms (Input to Output): 500Vrms (XMT to RCV)
 2. Insertion Loss: 1~10MHz: -1.0dB MAX
 3. Attenuation: Transmitt: -30dB MIN @ 30MHz Receiver: -18dB MIN @ 30MHz
 4. Return Loss: 1-10MHz: -15dB MIN
 5. Cutoff Frequency: 17MHz TYPICAL
 6. Crosstalk: 1-10MHz: -30dB MIN
 7. I/O Impedance: 100 OHMS

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

MODULAR JACK GANGED, 1 PORT, 8P8C

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
.X INCHES	±.10
.XX	±.020
.XXX	±.015
HOLES	±.10
Ø:XX	±.015
Ø:XXX	±.010
APPROVALS	
DRAWN	DY
CHECKED	
APPROVED	
DATE	4/01/11

SIZE	PART NO.	REV.
X	MTJ-88TX1-FSE-M68	-
REF: S00043C	SCALE: NTS	SHEET 2 OF 2

6

5

4

3

2

1