
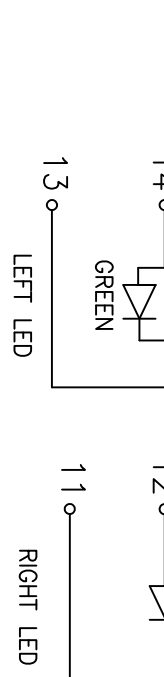


| Rev | AWO # | Description | Date | Appr |
|-----|-------|-----------------------------|------|------|
| | | SEE SHT 1 OF 2 FOR REVISION | | |

APPROVED: _____

DATE: _____ TITLE: _____

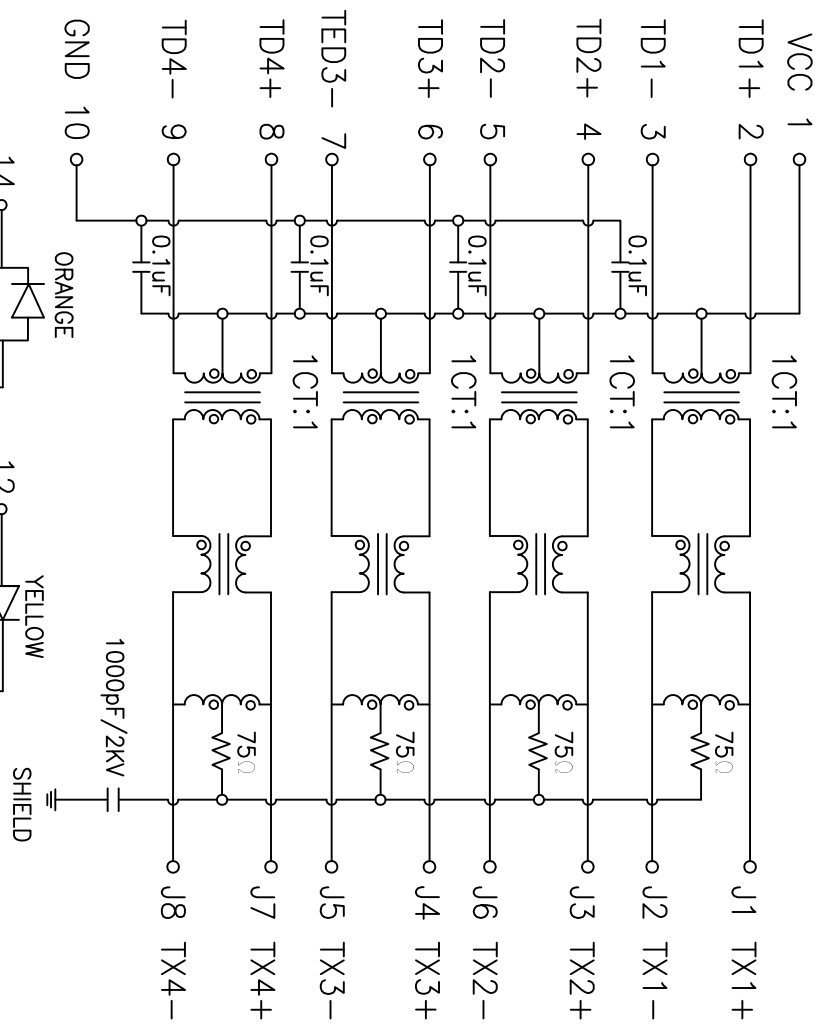

- SPECIFICATIONS:**
1. TR: (100KHz, 0.1V)
TX=1CT:1±2% RX=1CT:1±2%
 2. LX: (100KHz, 100mV, 8mA, DC Bias)
350uH MIN
 3. HIPOT:
1500VAC FOR 60 SECONDS
 4. Insertion Loss:
-1.0dB MAX @ 1.0Mz to 100MHz
 5. Return Loss:
-18dB MIN @ 1MHz to 30MHz
-16dB MIN @ 30MHz to 60MHz
-12dB MIN @ 60MHz to 80MHz
 6. Cross talk:
-40dB MIN @ 1MHz to 10MHz
-35dB MIN @ 32MHz to 60MHz
-30dB MIN @ 60MHz to 100MHz
 7. Common to Common Mode Rejection:
-30dB MIN @ 1MHz to 50MHz
-20dB MIN @ 50MHz to 150MHz

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]

TOLERANCES: EXCEPT AS NOTED

| INCHES | HOLES |
|------------|-------------|
| .X ±.10 | Ø.X ±.10 |
| .XX ±.020 | Ø.XXX ±.015 |
| .XXX ±.015 | Ø.XXX ±.010 |

APPROVALS

| | | |
|----------|----|---------|
| DRAWN | DY | DATE |
| CHECKED | | 1/13/11 |
| APPROVED | | |

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MODULAR JACK 8P8C & DUAL USB GANGED
 W/LED1 ORANGE/ GREEN, LED2 YELLOW

| | | |
|------|-----------------------|--------------|
| SIZE | PART NO. | REV. |
| X | MTJ-DUSB-88JX1-L-M139 | - |
| REF: | S00043C | SCALE: NTS |
| | | SHEET 2 OF 2 |