
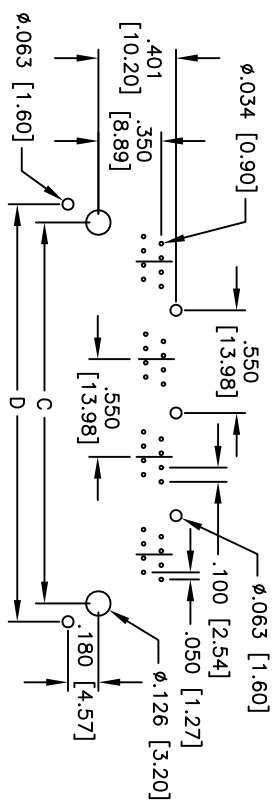
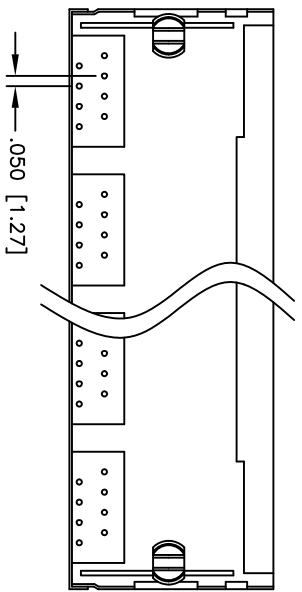
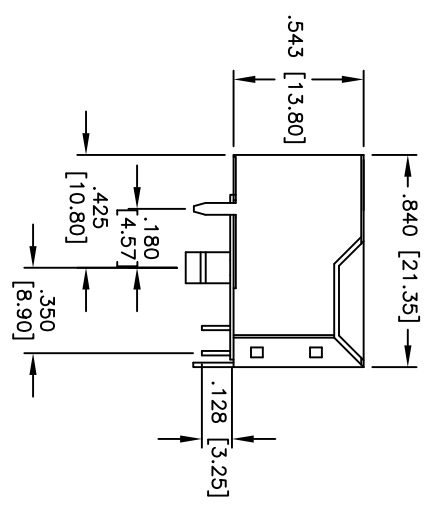


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/12/04	

APPROVED: _____
 DATE: _____ TITLE: _____

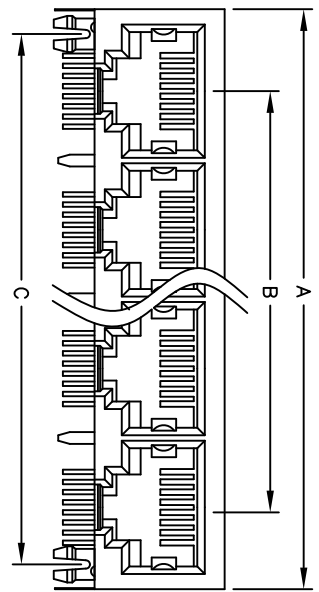

Recommended
PC Board Layout

PART NUMBER	PORTS	A				B				C				D	
		in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
MTJG-2-88GX1-FSG	1x2	1.220	31.00	.550	13.98	1.000	25.40	1.215	30.87						
MTJG-4-88GX1-FSG	1x4	2.326	59.10	1.651	41.94	2.100	53.34	2.318	58.90						
MTJG-6-88GX1-FSG	1x6	3.435	87.25	2.752	69.90	3.200	81.30	3.417	86.80						
MTJG-8-88GX1-FSG	1x8	4.520	114.80	3.853	97.86	4.300	109.22	4.512	114.60						

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MODULAR TELEPHONE JACK, GANGED
 8P8C, SHIELDED

SIZE	PART NO.	REV.
X	MTJG-X-88GX1-FSG	-
SCALE: MTS	SHEET 1 OF 1	

SPECIFICATIONS:

- Material: Insulator: PBT, glass reinforced, rated UL 94V-0
- Insulator color: Black
- Contacts: Phosphor Bronze
- Shield: Phosphor Bronze, Tin plated
- Contact Plating: Gold Flash over Nickel underplate on contact area, Tin over Copper underplate on tails
- Electrical: Operating voltage: 150 VAC max
- Current rating: 1.5 Amps max
- Contact Resistance: 20 Mohms max, initial
- Insulation resistance: 500 Mohms min @ 500 VDC
- Dielectric withstanding voltage: 1000 VAC for 1 minut
- Temperature Rating: Operating temperature: -40°C to +125°C
- Environmental: Lead free, RoHS compliant.
- Recommended soldering temp: 235°C for 5 sec.

