
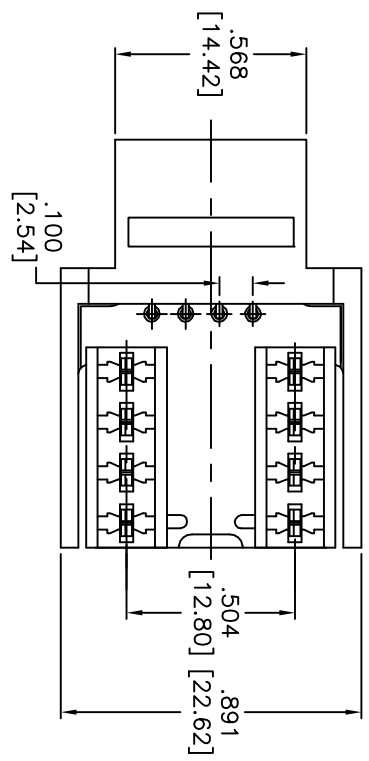


APPROVED: _____	DATE: _____	TITLE: _____
Rev	AWO #	Description
-	10670	RELEASED
Date	Appr	
11/01/10		

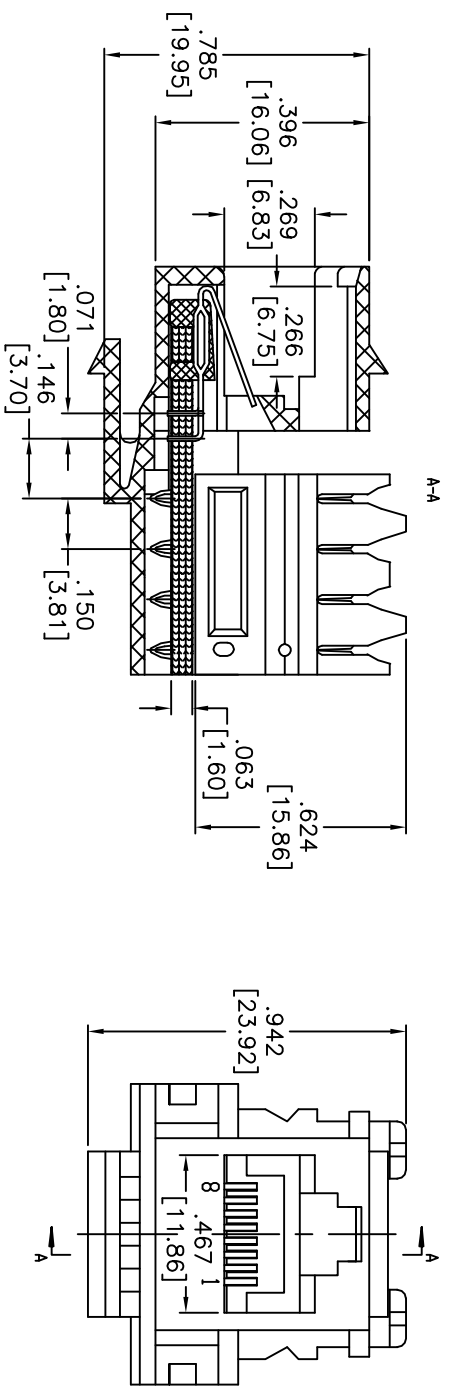

SPECIFICATIONS:

Material:
Housing: ABS, rated UL 94V-0, color Black
Contacts: Phosphor Bronze
Plating:
Gold over Nickel underplate on contact area.

Electrical:
Operating voltage: 125 VAC max
Current rating: 1.5 Amps max
Contact resistance: 45 mohms max
Insulation resistance: 1000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 1000 VAC for 1 minute
Temperature Rating:
Operating temperature: -40°C to +85°C

Environmental:
Lead free, RoHS compliant.
Recommended soldering temp: 235°C for 5 sec.



ADAM TECH

909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

MODULAR KEYSTONE JACK, 8P8C

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES		HOLE SIZE	
X	± .10	ØX	± .10
XX	± .020	ØXX	± .015
XXX	± .015	ØXXX	± .010
APPROVALS		DATE	
DRAWN	DY	11/01/10	
CHECKED			
APPROVED			
SIZE	PART NO.	SCALE	REV.
X	MTJK-88-02-C5E	NTS	
REF:	S00003C	SHEET	1 OF 1