
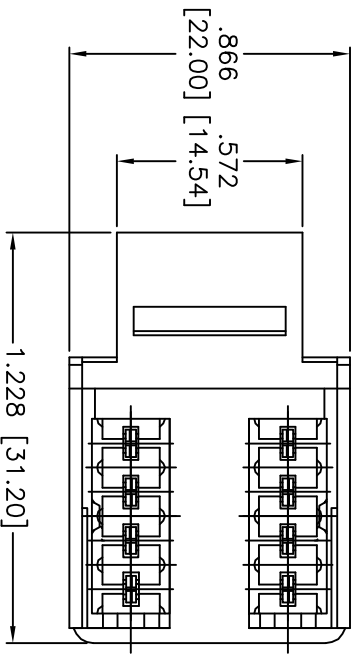
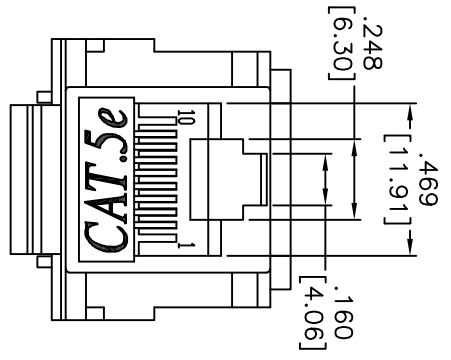


Rev	AWO #	Description	Date	Appr
-	9768	RELEASED	9/28/09	

APPROVED: _____
 DATE: _____ TITLE: _____

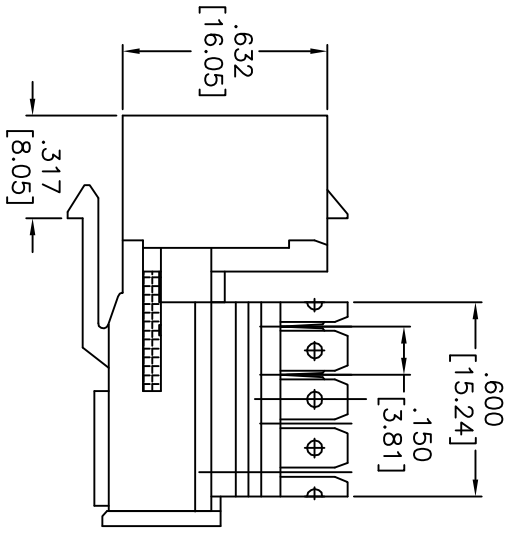

SPECIFICATIONS:

Material:
 Housing: ABS, rated UL 94V-0, color Ivory
 Insert: Nylon, rated UL 94V-0, color Ivory
 Contacts: Phosphor Bronze
 Plating:
 Gold over Nickel underplate on contact area.

Electrical:
 Operating voltage: 125 VAC max
 Current rating: 1.5 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 1000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -40°C to +85°C

Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.



ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MODULAR KEYSTONE JACK, 8P8C
 FLAT BLOCK, CAT 5e

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010
APPROVALS	DATE
DRAWN: DY	9/28/09
CHECKED	
APPROVED	

SIZE: X	PART NO.: MTJK-88-05-C5E-BK	REV.:
REF: S0005C	SCALE: NTS	SHEET 1 OF 1