


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/28/04	

APPROVED: _____
 DATE: _____ TITLE: _____

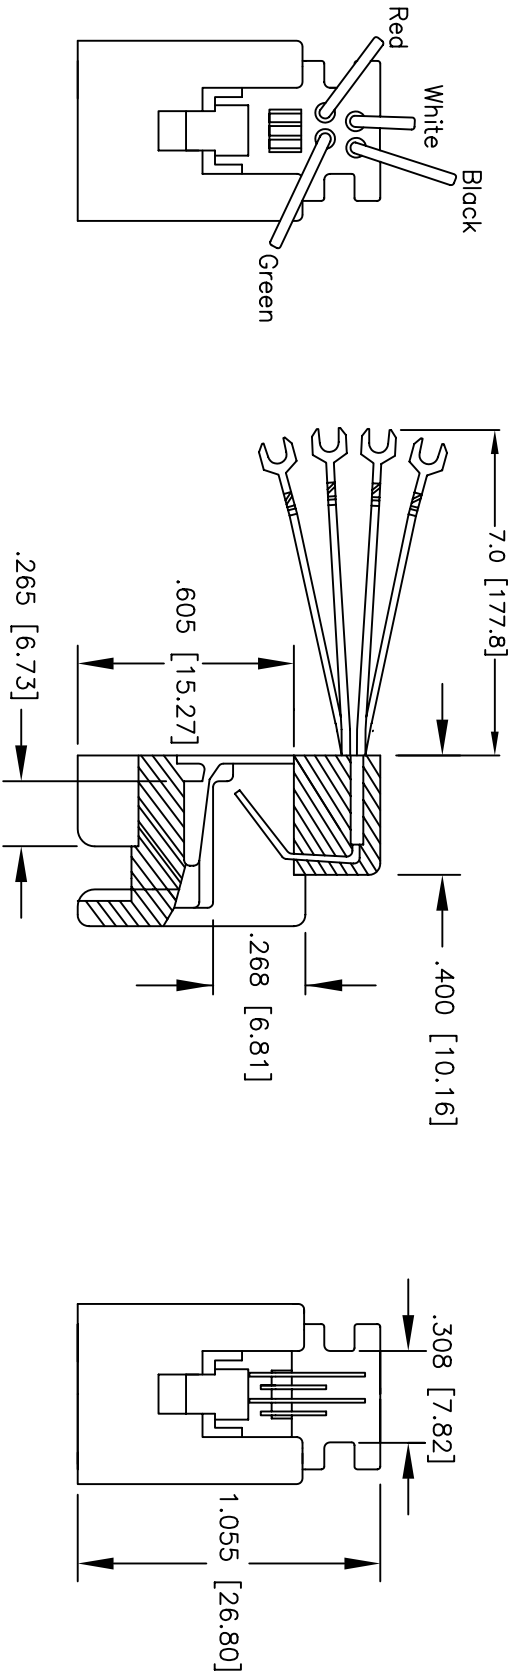

SPECIFICATION:

Material:
 Insulator: ABS, glass-reinforced thermoplastic rated UL 94V-0
 Insulator Color: Gray
 Contacts : Phosphor Bronze
Plating:
 "X" min Gold over Nickel underplate on contact area.

Electrical:

Operating voltage: 150 VAC max.
 Current rating: 1.5 Amps max.
 Contact resistance: 20 mohm max.
 Insulation resistance: 500 Mohm min.
 Dielectric withstanding voltage: 1000 VAC / minute between adjacent contacts.

Wire Gauge: #26 AWG

Temperature Rating:

Operating temperature: -40°C to +125°C

X	PLATING
0	15 μ" Gold
1	30 μ" Gold
2	50 μ" Gold

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: HANDSET TELEPHONE JACK, BODY 616P
 4P4C WITH 7" WIRES WITH SPADE TERM

SIZE	PART NO.	REV.
X	MTJP-616P-X-A2-2	-
REF:	SCALE: NTS	SHEET 1 OF 1